fischer

UltraCut FBS II.
High-performance concrete screw for absolute installation ease.

UltraCut FBS II
8, 10, 12 and 14 zinc-plated steel

The high-performance concrete screw for absolute installation ease in the interior area.

Unique saw-tooth geometry **cuts quickly into the concrete** – also in multiple use and reinforced concrete.

The UltraCut FBS II is available in different head designs. **Countersunk (SK) and hexagonal head (US)** with and without internal torx drive.

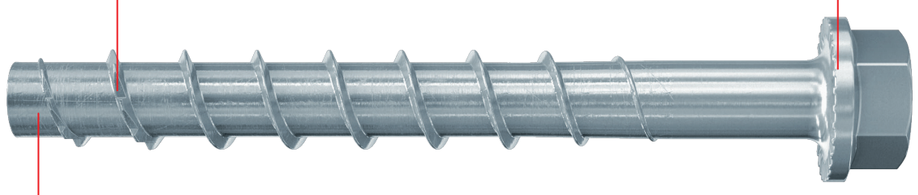

Through the special thread geometry, the screw flanks cut deeply into the concrete and allow **higher loads. This saves costs** because less anchor points and smaller base plates are required.

UltraCut FBS II 10x100 US

The short UltraCut FBS II, with a reduced embedment depth, allows for **a short drill hole depth, fast installation and less reinforcement hits** which makes it an efficient choice for many applications.

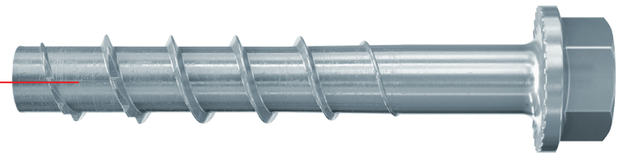

UltraCut FBS II 10x60 US

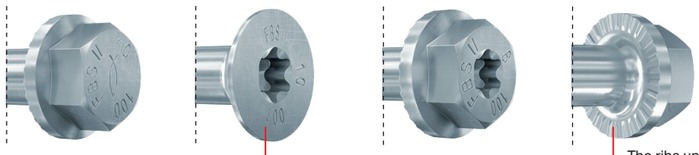

The countersunk head is suitable for **visually appealing installations**.

The ribs under the head prevent accidental loosening of the anchor making the system **more secure.**

Advantages and functions

Your advantages at a glance

- With up to 3 embedment depths, the UltraCut FBS II allows an optimal adaption to different applications / load requirements.
- Expansion-free anchoring (undercut) allows for lowest edge- and axial spacings.
- The assessment (ETA Option 1) covers the use of single-point anchors in cracked and non-cracked concrete.
- The performance categories seismic C1 and C2 ensure that the strictest of safety standards and earthquake specifications can be fulfilled.
- The approved adjustment for the concrete screws allows the screw to be unscrewed twice for a total length of 20 mm, to place maximum 10 mm packing below the base plate head or to align the attached part, and then to tighten the screw again.
- The concrete screws are also approved for multiple use in temporary fixings (e.g. inclined supports) after a verification with the checking gauge FUP. Also with young concrete 10 N/ mm².
- Drill holes do not need to be cleaned during vertical installation (ceiling and floor).
- The fischer concrete screw FBS II 8-10 offer the possibility for the ETA compliant application in masonry bricks. This grants high security not only in concrete but also in many other applications in other substrates (valid for the base materials solid clay bricks (EN771-1), sand-lime bricks KSL (EN711-2) and solid sand-lime bricks KSV (EN771-2) according to the specification of the ETA-20/0134).

Functioning

- The UltraCut FBS II is recommended for the push-through installation.
- The screw is installed correctly when the screw head sits flush on the fixture and cannot be screwed in deeper (visual setting control).
- Drill holes do not need to be cleaned during vertical installation (ceiling and floor). For floor fixings the hole must be drilled 3x drill hole diameter deeper.
- We recommend using a tangential impact wrench with a suitable impact wrench socket (e.g. fischer FSS 18V) or an internal torx drive.
- The assessment documents (ETA-15/0352, ETA-20/0321 and ETA-20/0134) also cover the use of hollow drills with automatic drill hole cleaning and the use of diamond drilling holes (except ETA-20/0134).
- The UltraCut FBS II US 8-14 as concrete-concrete connector is also suitable for the strengthening of existing concrete structures through a top concrete layer.
- For the installation in masonry, please follow the instruction guidelines in the packaging with the suitable torque setting (impact wrench levels).

Certificates / Features

ETA-15/0352, for cracked concrete

ETA-20/0321, for cracked concrete. Connector for strengthening of existing concrete structures through top concrete layer.

ETA-20/0134 for masonry

Temporary fixings

According VdS CES-Guidelines for sprinkler systems

Recommendations

Suitable for building materials, such as



Cracked concrete



Uncracked concrete

Masonry brick*

Solid sand-lime brick*



Perforated sand-lime brick*

* ETA approval for diameter 8 and 10

Installation

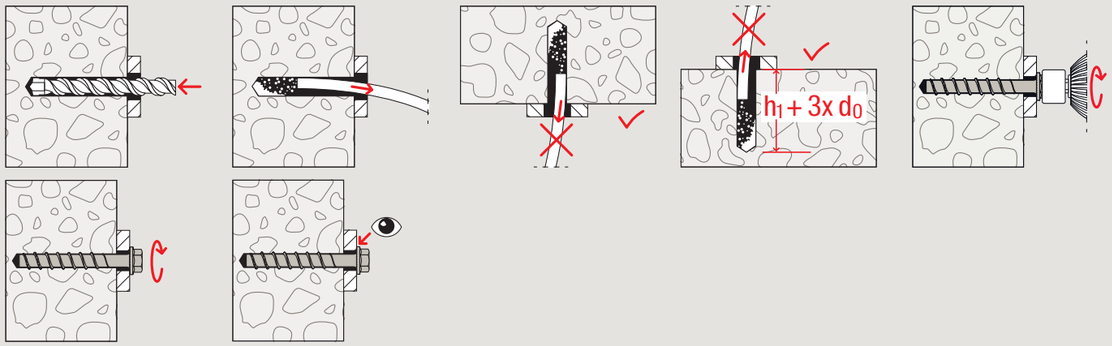

Fixture adjustment

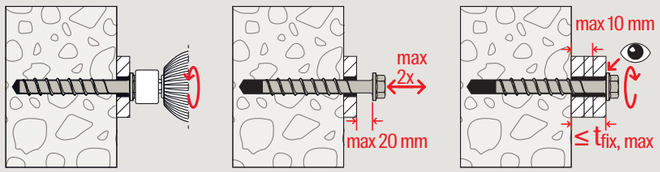

Annular gap filling,

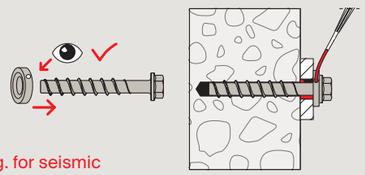

e.g. for seismic

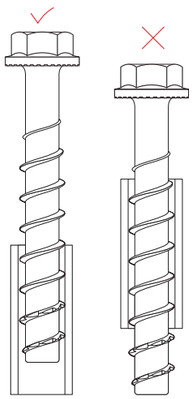

UltraCut FBS II for multiple use of temporary fixings

The FBS II can be used to install temporary construction site installations such as guardrails, inclined supports and frameworks in young concrete of 10 N/mm².
Therefore the FBS II 8, 10, 12 and 14 made of galvanised zinc-plated steel are approved for temporary indoor and outdoor use.
After dismantling, the fischer concrete screw FBS II can be reused.
Depending on the concrete quality, ten or more applications of the same FBS II are possible.
For this purpose the abrasion of the thread is examined with the corresponding checking gauge.

Applications

UltraCut FBS II 8,10,12 and 14

Metal construction

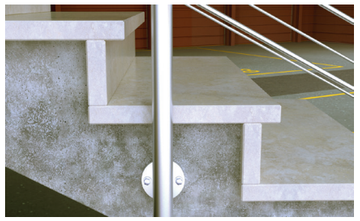

Railings

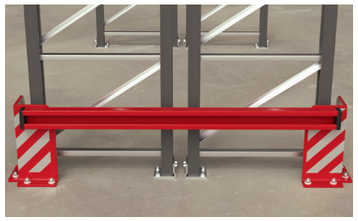

Shelving systems

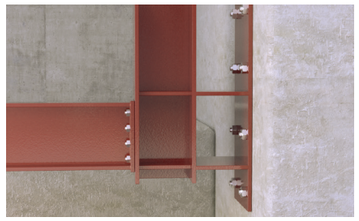

Brackets / base plates

Formwork construction / site facilities

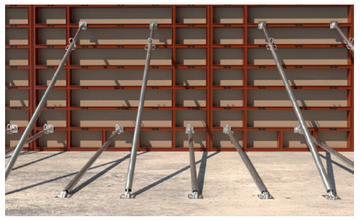

Inclined supports

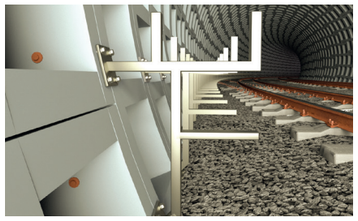

Construction site installations in tunnels

Timber work

Step/rise anchorage

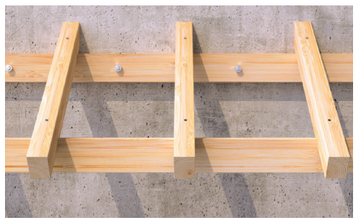

Beam anchorage

Sanitary, heating and electrical industry

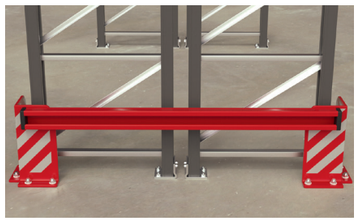

Suspended mounting channels

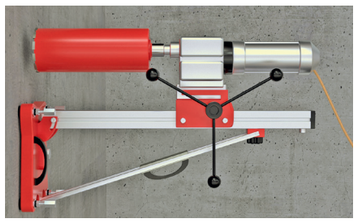

Diamond drilling equipment

Cable trays

UltraCut FBS II
8, 10 and 12 stainless steel R.

The high-performance concrete screw for absolute installation ease in the exterior area.

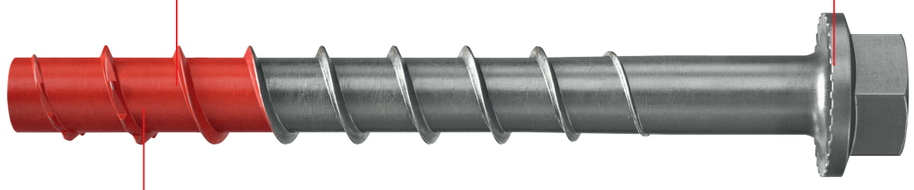

Unique saw-tooth geometry **cuts quickly into the concrete – also in reinforced concrete.**

The UltraCut FBS II R is available in different head designs. **Countersunk (SK) and hexagonal head (US).**

The specially hardened red tip provides **faster and more secure installation**.

UltraCut FBS II 10x100 US R

The short UltraCut FBS II R, with a reduced embedment depth, allows for a **short drill hole depth, fast installation and less reinforcement hits.**

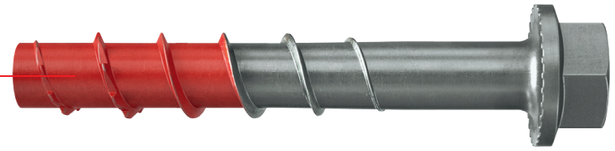

UltraCut FBS II 10x60 US R

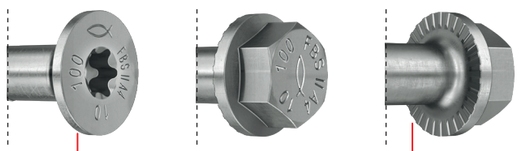

The countersunk head is suitable for **visually appealing installations.**

The ribs under the head prevent accidental loosening of the anchor making the system **more secure.**

Advantages and functions

Your advantages at a glance

- With up to 3 embedment depths, the UltraCut FBS II allows for the same screw to be used for different component thicknesses.
- Expansion-free anchoring (undercut) allows for lowest edge- and axial spacings.
- The assessment (ETA Option 1) covers the use of single-point anchors in cracked and non-cracked concrete.
- The performance categories seismic C1 and C2 ensure that the strictest of safety standards and earthquake specifications can be fulfilled.
- The approved adjustment for the concrete screws allows the screw to be unscrewed twice for a total length of 20 mm, to place maximum 10 mm packing below the base plate head or to align the attached part, and then to tighten the screw again.
- Drill holes do not need to be cleaned during vertical installation (ceiling and floor).
- The fischer concrete screw FBS II 8-10 offer the possibility for the ETA compliant application in masonry brick. This grants high security not only in concrete but also in many other applications in other substrates (valid for the base materials solid clay bricks (EN771-1), sand-lime bricks KSL (EN711-2) and solid sand-lime bricks KSV (EN771-2) according to the specification of the ETA-20/0134.

Functioning

- The UltraCut FBS II R is recommended for the push-through installation.
- The screw is installed correctly when the screw head sits flush on the fixture and cannot be screwed in deeper (visual setting control).
- We recommend using a tangential impact wrench with a suitable impact wrench socket (e.g. fischer FSS 18V) or an internal torx drive.
- The assessment document also covers the use of hollow drill with automatic drill hole cleaning and the use of diamond drilling holes.
- For the installation in masonry, please follow the instruction guidelines in the packaging with the suitable torque setting (impact wrench levels).

Certificates / Features

ETA-17/0740, for cracked concrete

ETA-20/0134 for masonry

R 120

Seismic C2

According VdS CES-Guidelines for sprinkler systems

Recommendations

Suitable for building materials, such as



Cracked concrete

Uncracked concrete

Masonry brick *

Solid sand-lime brick*



Perforated sand-lime brick*

* ETA recommendation for diamater 8 and 10

Installation and applications

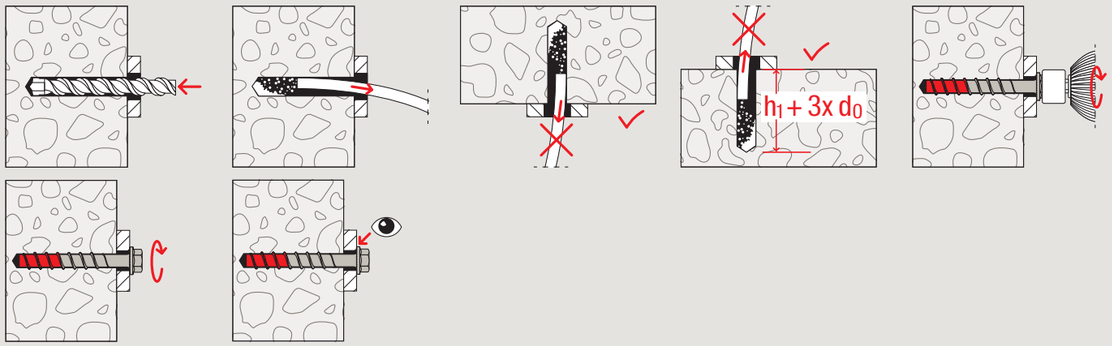

Fixture adjustment

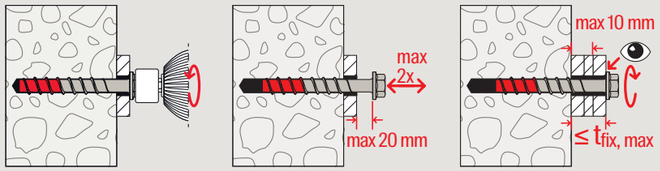

Annular gap filling,

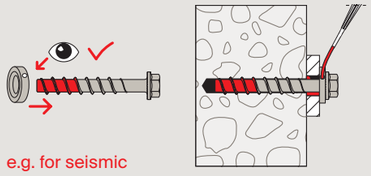

e.g. for seismic

UltraCut FBS II 8, 10 and 12 stainless steel R

Metal construction and outdoor applications

Railings

Brackets / base plates

Canopies

Stadium seating anchoring

Balcony railings

Column footing

Concrete screw UltraCut FBS II. The assortment for a wide range of applications.

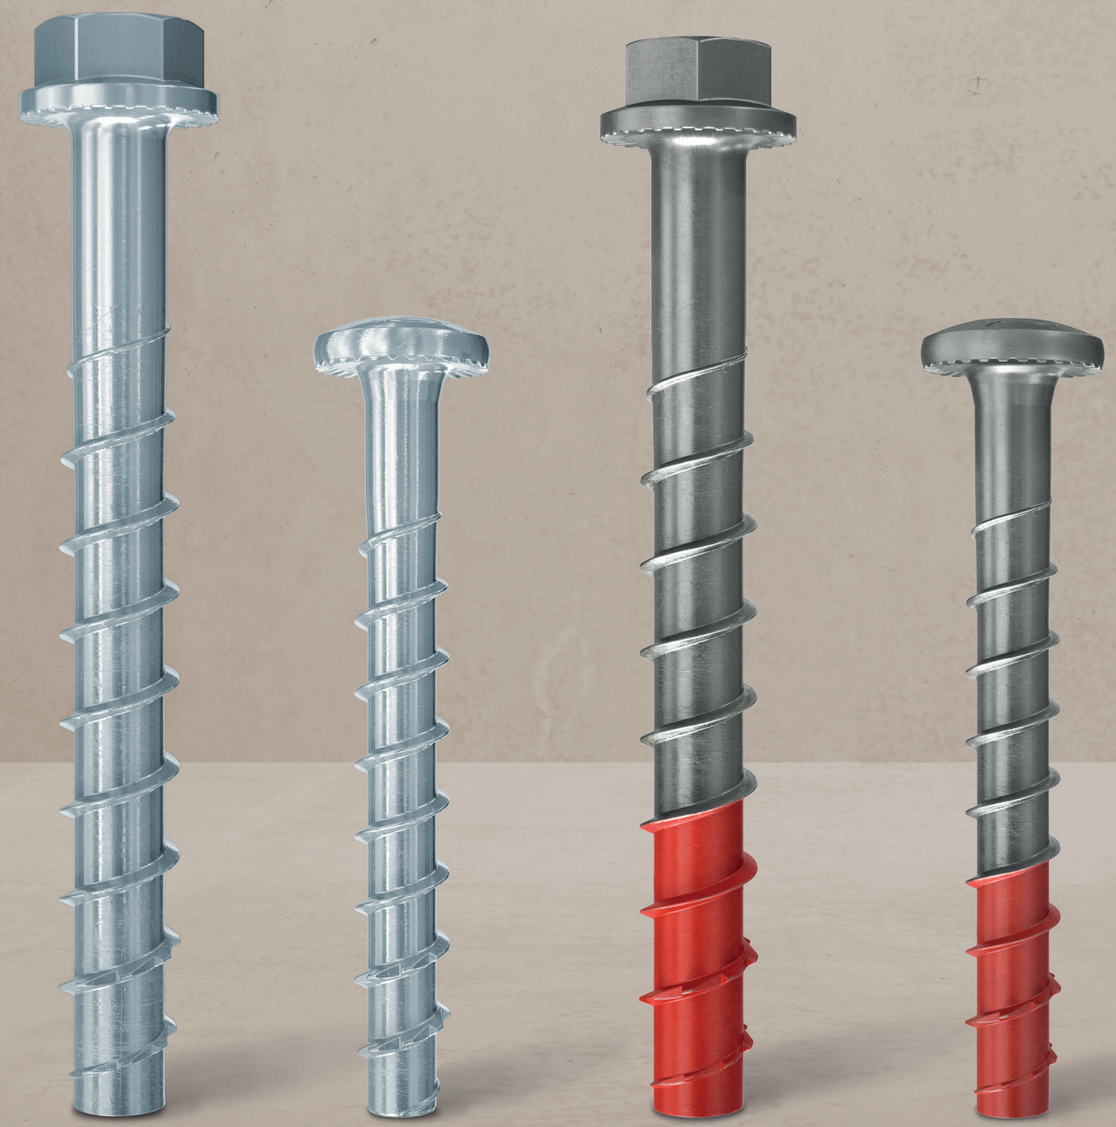

FBS II gvz | FBS II 6 gvz | FBS II R | FBS II 6 R

UltraCut FBS II 6 zinc-plated steel and stainless steel R

Different head designs offer a maximum of flexibility and a perfect adaptation to the application.





UltraCut FBS II 6 SK

The special double angle on the under-head geometry increases the stability of the concrete screw during screwing in.



UltraCut FBS II 6 P / LP

The design of the concrete screw with panhead and large panhead allows aesthetic installation.



UltraCut FBS II 6 US

The special head geometry for use in mounting rails (up to 17 mm slot width) with a socket (SW10) enables simple installation of the add-on part.



UltraCut FBS II 6 M8 oder M10

The hanger bolt enables the easy and suitable application of pipe clamps and connecting elements.



UltraCut FBS II 6 M6 I, M8/M10 I

The design of the concrete screw with connection sleeve with step thread offers maximum flexibility when mounting threaded rods or connecting elements.



UltraCut FBS II 6 SK R

UltraCut FBS II 6 P R



UltraCut FBS II 6 US R (SW13)



UltraCut FBS II 6 US R (SW10)

Advantages and functions

Your advantages at a glance

- The speicla ratio between flank and shaft diameter allows for a deep and fast cutting into the concrete.
- The European Technical Approval (ETA) Option 1 includes the use in cracked and non-cracked concrete for highest safety requirements. The UltraCut FBS II 6 is approved for multiple use of non-load bearing systems and thereby ideal for the installation of pipe routes and prestressed hollow concrete ceilings.
- The FBS II 6 also has an ETA for seismic performance category C1 for additional safety standards.
- The fischer concrete screw FBS II 6 zinc-plated offer the possibility for the ETA compliant application in masonry brick. This grants high security not only in concrete but also in solid clay bricks (ENtt1-1), sand-lime bricks KSL (EN711-2) and solid sand-lime bricks KSV (EN771-2).
- The expansion-free anchorage (undercut) ensures low edge and axial spacings.
- The approved adjustment for the concrete screws allows the screw to be unscrewed twice for a total length of 20 mm, to place maximum of 10 mm packing below the screw head or to align the attached part, and then to tighten the screw again.
- Drill holes do not need to be cleaned during vertical installation (ceiling and floor) with the FBS II 6 zinc-plated.
- The stainless steel concrete screw guarantees a high level of corrosion resistance especially for wet rooms and external applications.

Functioning

- The UltraCut FBS II 6 ZN-plated is recommended for the push-through and pre-positioned installation.
- The screw is installed correctly when the screw head sits flush on the fixture/substrate surface and cannot be screwed in deeper (visual setting control).
- We recommend using a tangential impact wrench with a suitable impact wrench socket or an internal torx drive.
- For the installation in masonry, please follow the instruction guidelines in the packaging with the suitable torque setting (impact wrench levels).

Certificates / Features

ETA-15/0352, for cracked concrete (for FBS II 6 zinc-plated)

ETA-18/0242 for non-structural applications in cracked concrete (for FBS II 6 zinc-plated)

ETA-20/0134 for masonry (for FBS II 6 zinc-plated)

ETA-17/0740 for cracked concrete (for FBS II 6 R)

ETA-24/0973 for non-structural applications in cracked concrete (for FBS II 6 R)

R 120

Seismic C1

FBS II 6 R

According VdS CES-Guidelines f or sprinkler systems

Recommendations

Suitable for building materials, such as



Cracked concrete



Uncracked concrete

Masonry brick*

Solid sand-lime brick*



Perforated sand-lime brick*

* Only FBS II 6 zinc-plated steel

Installation

UltraCut FBS II 6 zinc-plated steel

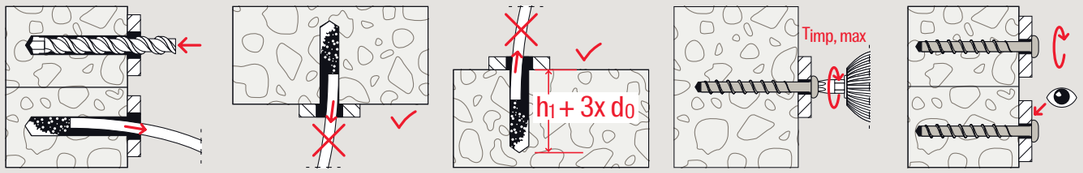

Fixture Adjustment

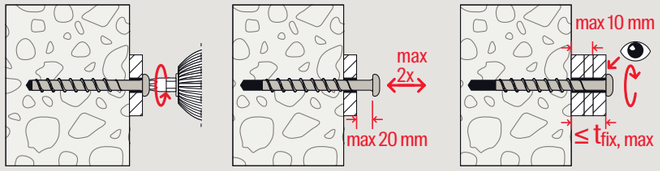

Annular gap filling

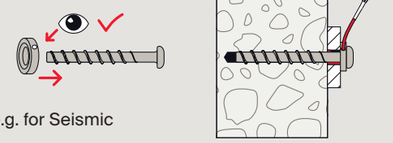

e.g. for Seismic

UltraCut FBS II 6 stainless steel R

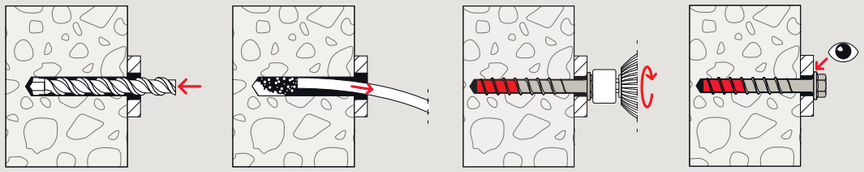

Fixture Adjustment (ETA-24/0973)

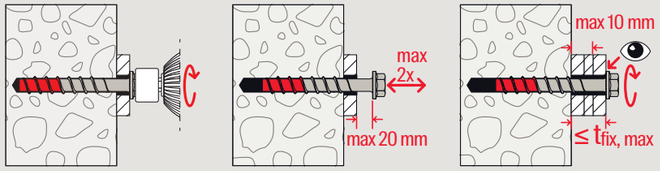

Annular gap filling

Variable embedment depths (Multiple use of redundant systems)

Enables a flexible adaptation to the loads.

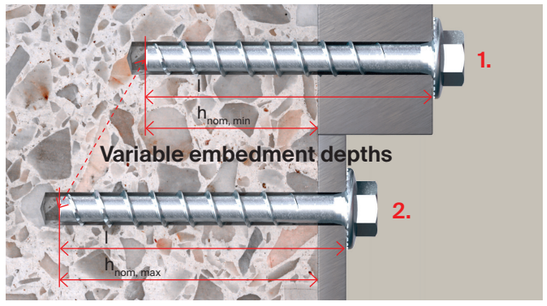

1. **Fast installation due to minimum embedment depth e.g. FBS II 6x60/5 US**
   - Minimum embedment depth is 25 mm
   - Permissible tensile load at $h_{nom, min}$ = 25 mm is 0.7 kN
   - Permissible shear load at $h_{nom, min}$ = 25 mm is 1.8 kN
2. **Maximum load due to maximum embedment depth e.g. FBS II 6x60/5 US**
   - Minimum embedment depth is 55 mm
   - Permissible tensile load at $h_{nom, max}$ = 55 mm is 4.0 kN
   - Permissible shear load at $h_{nom, max}$ = 55 mm is 6.3 kN

Applications

UltraCut FBS II 6

Sanitary, heating and electrical industry

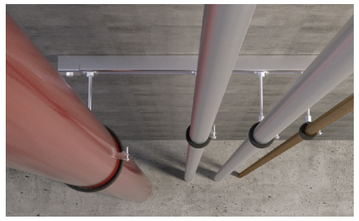

Mounting channels

e.g. UltraCut FBS II 6 US

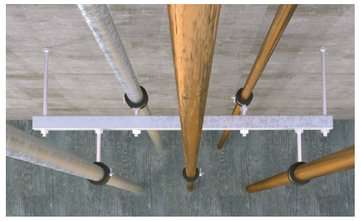

Suspended mounting channels

e.g. UltraCut FBS II M8/19

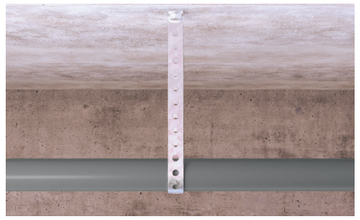

Perforated tapes

e.g. UltraCut FBS II LP

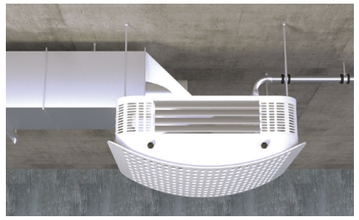

Prestressed hollow concrete ceilings

e.g. UltraCut FBS II M8/M10 I



UltraCut FBS II 6 R

Façade, Tunnel

Letterbox / Lamp

e.g. UltraCut FBS II 6 SK R

Façade substructures

e.g. UltraCut FBS II 6 US R

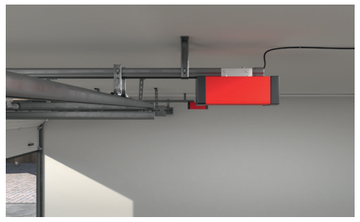

Garage door opener plus rail

e.g. UltraCut FBS II 6 P R

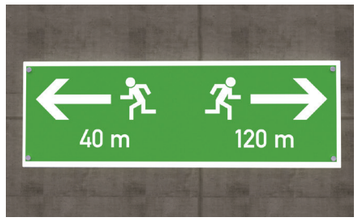

Fastening emergency exit sign in tunnel

e.g. UltraCut FBS II 6 P R

UltraCut FBS II 8, 10, 12 and 14 CP

The high-performance concrete screw for absolute installation ease with a special coating.

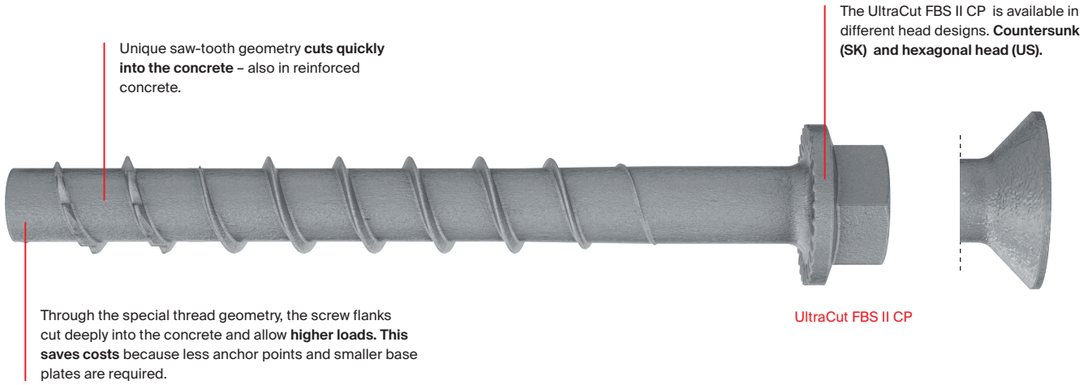

Tested and approved: High protection of the coating against red rust.

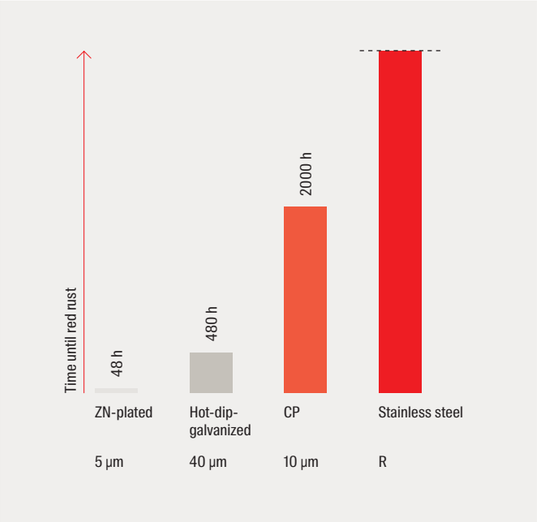

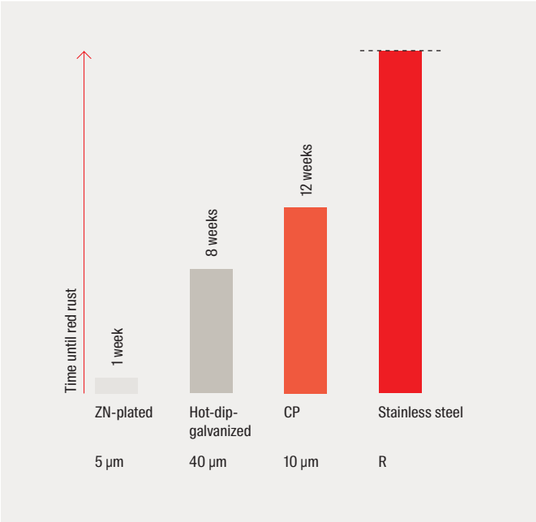

Salt spray chamber mist test

The UltraCut FBS II was developed in different coatings subjected to the salt spray chamber mist test according to DIN EN ISO 9227. The result is that the UltraCut FBS II CP coating withstands at least 2,000 h without red rust.

Climate change test (among other things based on Nord-test Method NT)

The climate change test simulates a realistic environment with changing humidity and heat. Here too, the coating of the UltraCut FBS II CP performs significantly better than the usual coatings galvanised zinc-plated (ZN-plated) and hot deep galvanised (HDG).

Advantages and functions

Your advantages at a glance

- The innovative surface coating enables an additional corrosion protection (e.g. through external test reports for the salt spray chamber mist test over 2000 h).
- With up to 3 embedment depths, the UltraCut FBS II allows for the same screw to be used for different component thicknesses.
- The ETA approval covers the application in cracked concrete and the seismic performance categories C1 and C2.
- First concrete screw with an ETA for masonry for a variable field of applications.
- The fischer concrete screw FBS II 8-10 offer the possibility for the ETA compliant application in masonry brick. This grants high security not only in concrete but also in many other applications in other substrates (valid for the base materials solid clay bricks (EN771-1), sand-lime bricks KSL (EN711-2) and solid sand-lime bricks KSV (EN771-2) according to the specification of the ETA-20/0134.

Functioning

- The UltraCut FBS II CP is recommended for the push-through installation.
- The screw is installed correctly when the screw head sits flush on the fixture and cannot be screwed in deeper (visual setting control).
- We recommend using a tangential impact wrench with a suitable impact wrench socket (e.g. fischer FSS 18V) or an internal torx drive.
- The assessment document also covers the use of diamond drilled holes.
- For the installation in masonry, please follow the instruction guidelines in the packaging with the suitable torque setting (impact wrench levels).

Certificates / Features

ETA-15/0352, for cracked concrete

ETA-20/0134 for masonry

R 120

Seismic C2

According VdS CES-Guidelines for sprinkler systems

Recommendations

Suitable for building materials, such as


Cracked concrete


Uncracked concrete

Masonry brick *


Solid sand-lime brick*


Perforated sand-lime brick*

* ETA recommendation for diamater 8 and 10

Installation and applications

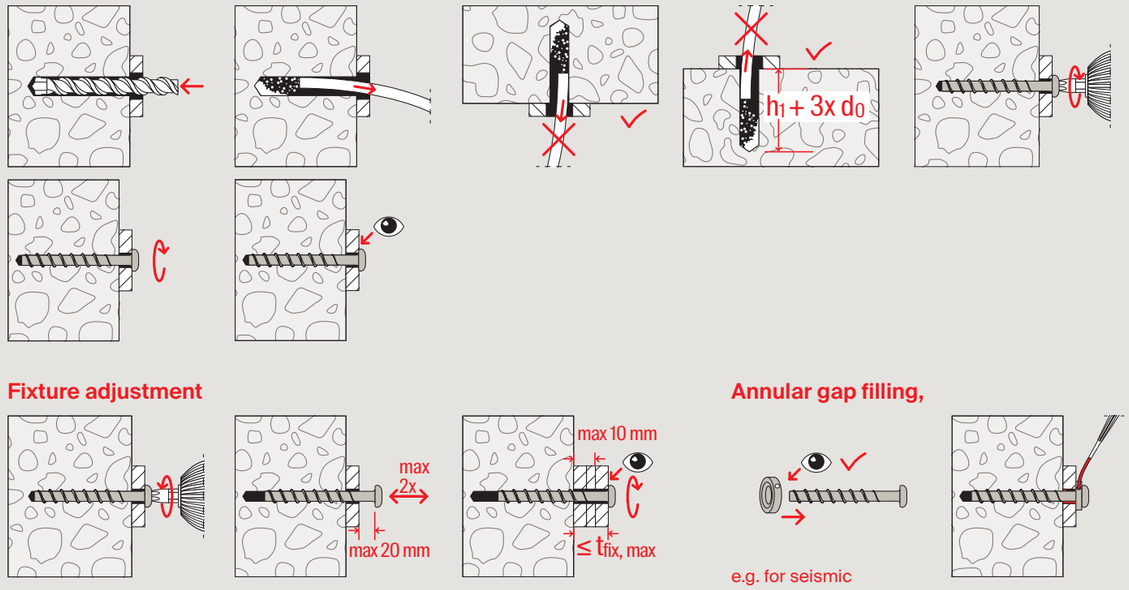

UltraCut FBS II CP

Steel construction

Façade substructures

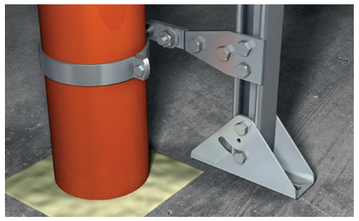

Connection angle

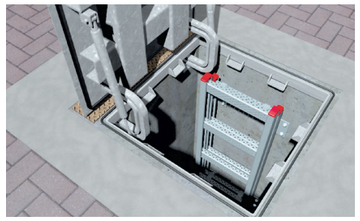

Ladder shafts

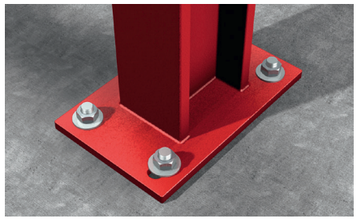

Steel girders

Coatings and its base materials

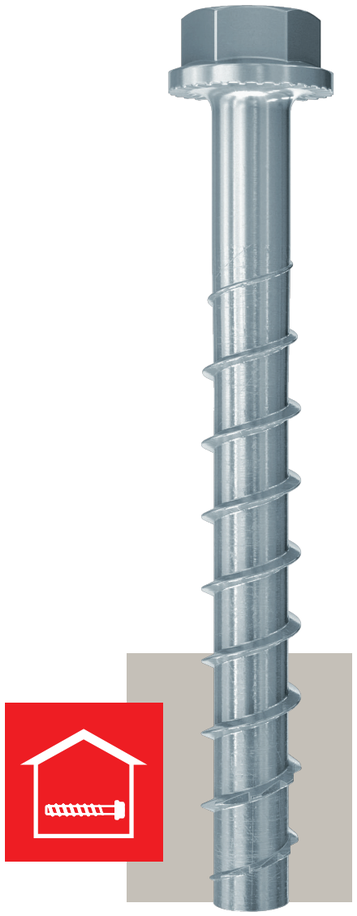

Economic solution: FBS II ZN-plated
Lasting and safe corrosion protection in the dry indoor area. ETA-15/0352 (guarantees a lifetime of 50 years in indoor areas).

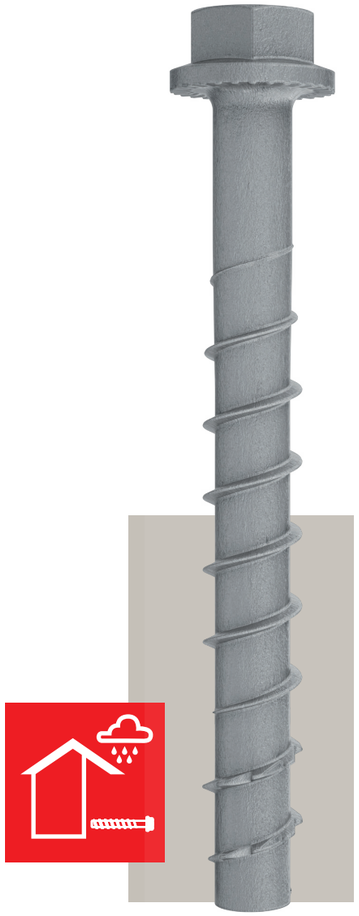

The long-lasting one: FBS II CP
Long-lasting coating in comparison with the FBS II ZN-plated (among other things with an external test report for the salt spray chamber mist test of 2.000h).

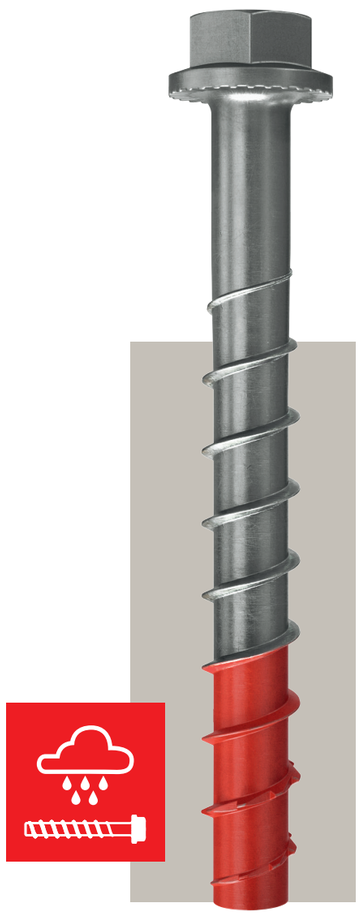

The extremely durable: FBS II R
Extremely long-lasting and weather-resistant material. The durable solution for the exterior area (ETA 17/0740 guarantees 50 years in the exterior area). Suitable for use in corrosive environments (C3) according to internal technical data from fischer.

UltraCut FBS II 6 – 10 zinc-plated steel, 8 – 10 CP and stainless steel R in masonry

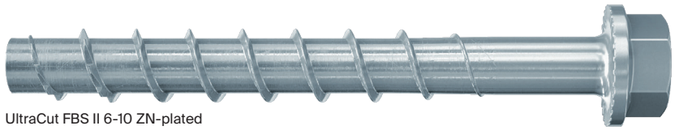

UltraCut FBS II 6-10 ZN-plated

UltraCut FBS II 8-10 R

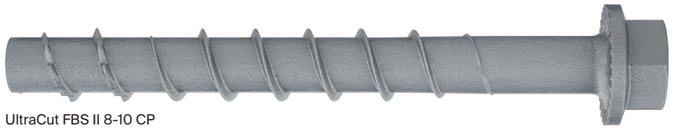

UltraCut FBS II 8-10 CP

Certificates / Features

CE

R 120

ETA-20/0134
for masonry

Your advantages at a glance

- Due to the large ratio between flank and shank diameter, the concrete screw cuts deep into the substrate and ensures low displacement under load.
- The fischer concrete screws FBS II 6-10 offer the innovative possibility for the ETA compliant application in masonry. This grants high security not only in concrete but also in many other applications in other substrates.
- The concrete screw FBS II 6-10 in zinc-plated steel, special coated CP and stainless steel R has an ETA for masonry brick (EN771-1), solid sand-lime bricks (EN771-2) and perforated sand-lime bricks KSL (EN771-2) according to the specification of the ETA-20/0134.
- The installation of the concrete screw FBS II 6-10 in zinc-plated steel and stainless steel R in masonry brick can be made in the joints not bigger than 3 mm or in plastered substrates also in group.

Applications

TV installation

Radiator

Recommendations

Suitable for building materials, such as

Masonry brick



Solid sand-lime brick

Perforated sand-lime brick

Installation in masonry

UltraCut FBS II 6-10 gvz

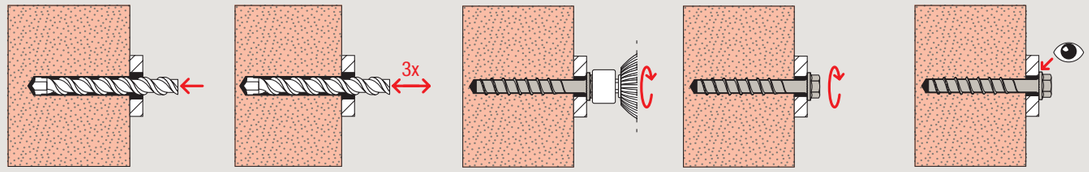

Fixture adjustment

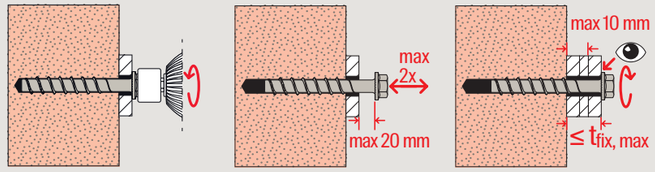

UltraCut FBS II 8-10 R

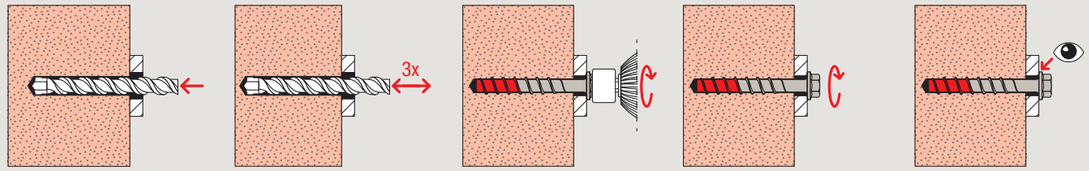

Fixture adjustment

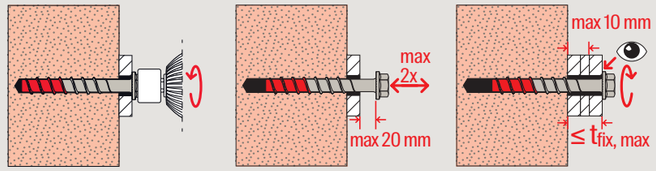

UltraCut FBS II zinc-plated steel as concrete-concrete connector

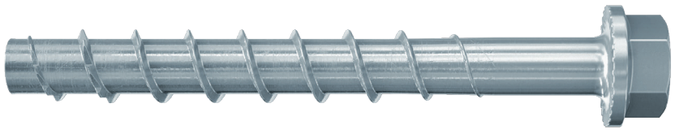

UltraCut FBS II ZN-plated

Setting tool SC-ST

Your advantages at a glance

- ETA-approval for the fixing of FBS II as a top concrete or concrete-concrete connector for the strengthening of bridges or old buildings.
- Due to the optional setting tool SC-ST the distance of 40 mm to the existing concrete can be easily reached and an ETA-conform, error-free installation of the FBS II is guaranteed.
- Depending on the diameter of the FBS II three embedment depths are possible.

Functioning

- The UltraCut FBS II is is mounted with a tangential impact wrench (e.g. the fischer FSS 18V) and the setting tool SC-ST. As soon as the setting tool sits flush to the concrete surface the correct distance is reached and the installation is finally done.

Concrete-concrete connections

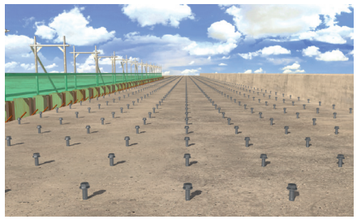

Bridge reinforcement

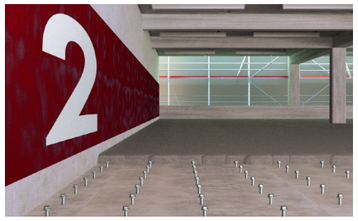

Parking garage reinforcement

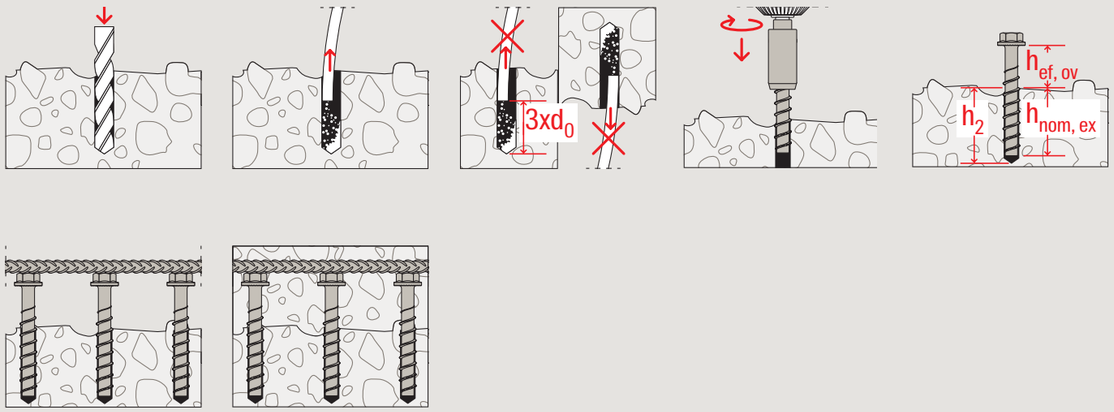

UltraCut FBS II 10 zinc-plated steel with adjusting washer FSW

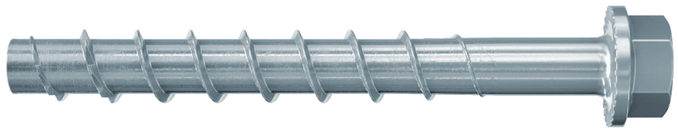

UltraCut FBS II 10 ZN-plated

Adjusting washer FSW

Your advantages at a glance

- Together with the adjusting disc and the fischer UltraCut FBS II 10 concrete screw wooden beams and wooden sleepers can be adjusted easily and quickly.
- The adjustment process is simplified, so that the support of a second person is not required.
- The adjusting disc is attached to the wooden beam using commonly available screws (recommendation: fischer Power-Fast FPF-PT 5x40, Art. no. 652880).
- After the installation the space under the wood should be injected with mortar.

Functioning

- After the installation of the concrete screw with two adjusting discs FSW the FBS II can easily be loosened, to place maximum 10 mm packing below the wooden beam, and fixed again.
- For installation a tangential impact wrench (e.g. the fischer FSS 18V) with a suitable impact wrench socket or an internal torx drive is recommended.

Timber construction

Wooden sleepers adjustment

Wooden beams adjustment

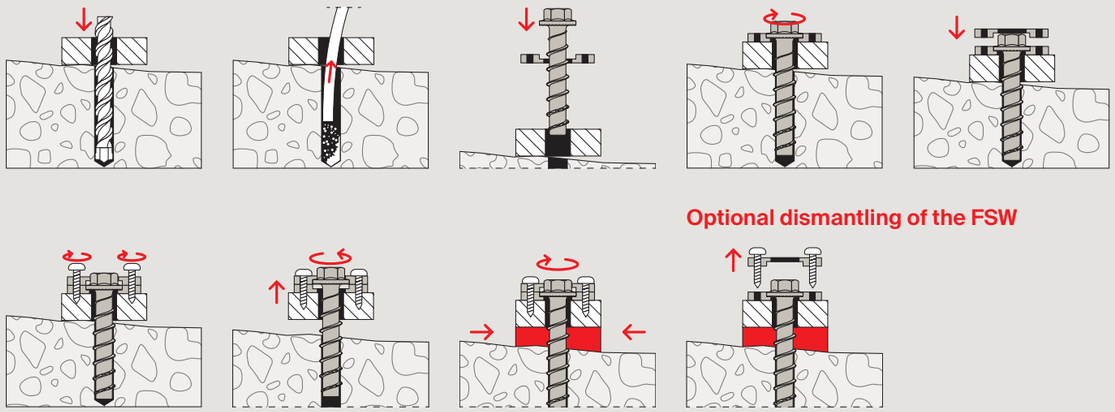

Concrete screw FBS 4 and 5 zinc-plated steel

The cost-efficient concrete screw for high installation ease.





FBS 5 SK

The fischer concrete screw FBS 5 SK is made of zinc-plated steel with a countersunk head and a torx.



FBS 4 Kabelschellenschraube

The fischer concrete screw FBS 4 cable clamp screw is made of zinc-plated steel. It is perfectly designed for applications like fixings of cable clamps.



FBS 4 & 5 P

The fischer concrete screw FBS 4 and 5 P is made of zinc-plated steel with a panhead and torx.



FBS 5 US

The fischer concrete screw FBS 5 US is made of zinc-plated steel with a hexagonal head and pressed washer.



FBS 5 M6

The fischer concrete screw FBS 5 stud screw is made of zinc-plated steel with a stud screw. It is perfectly designed for applications such as fastening pipe clamps.

Recommendations

Suitable for building materials, such as:



Cracked concrete*



Uncracked concrete*

Brick (solid brick)



Solid sand-lime bricks

*) Including recommended loads, see load table

Advantages and functions

Your advantages at a glance

- Quick and easy assembly and disassembly using a cordless screwdriver, tangential impact wrench or manual installation.
- The recommended loads for concrete (cracked and uncracked) make the application more secure.
- The concrete screw FBS 4 and 5 offer the possibility for use in masonry, like solid sand-lime bricks, for a flexible use in different substrates.
- Fire resistant values according R120 enable the use in case of fire.
- The FBS 4 cable clamp scrrew is ideal for fixing cable clamps.
- The FBS 5 M6 is ideal for fastening clamps.
- Two embedment depths enable high flexibility for example for plaster bridging and a precise adaption.
- The sawtooth geometry enables fast cutting into the base material.
- The expansion-free anchorage system (undercut) enables low edge and axial spacings.

Functioning

- The concrete screw FBS 4 and 5 is recommended for the push-through installation. The FBS 5 M6 is recommended for pre-positioned installation.
- We recommend using a cordless screwdriver, tangential impact wrench or manual installation.
- Drill hole cleaning is necessary.
- The screw is installed correctly when the screw head sits flush on the fixture and cannot be screwed in deeper (visual setting control).

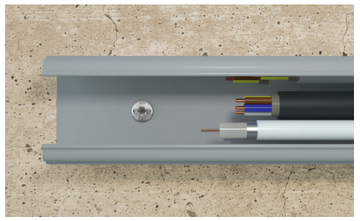

Cable trays

Surface-mounted sockets

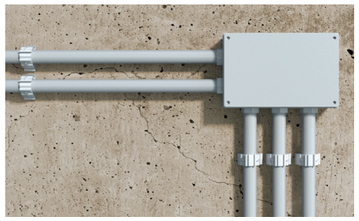

Fixing of cable clamps and junction boxes

Certificates / Features

Concrete screw FBS 4 and 5

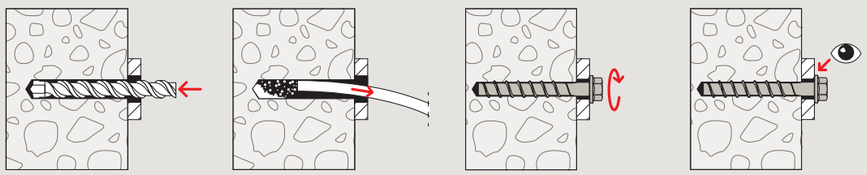

Assortment





Concrete screw UltraCut FBS II galvanised steel

UltraCut FBS II US (TX) - hexagon head UltraCut FBS II SK - countersunk head

Item	Zinc-plated steel Item no.	Ap-proval ETA	Nominal drill-Ø d_0 [mm]	Minimum drill depth at push-through mode h_2 [mm]	Screws outer diameter x length [mm]	Screwing depth $h_{nom,1}$ [mm]	$t_{fix\,1}$ [mm]	$h_{nom,2}$ [mm]	$t_{fix\,2}$ [mm]	$h_{nom,3}$ [mm]	$t_{fix\,3}$ [mm]	Width across flat / internal torx drive [SW/TX]	Sales unit [pcs]
Item	**gvz**												
FBS II 8x55 5/- US TX	**536851**	●	8	65	10x55	50	5	-	-	-	-	13/40	50
FBS II 8x70 20/5 US TX	**536852**	●	8	80	10x70	50	20	-	-	65	5	13/40	50
FBS II 8x80 30/15 US TX	**536853**	●	8	90	10x80	50	30	-	-	65	15	13/40	50
FBS II 8x90 40/25 US TX	**536854**	●	8	100	10x90	50	40	-	-	65	25	13/40	50
FBS II 8x100 50/35 US TX	**536855**	●	8	110	10x100	50	50	-	-	65	35	13/40	50
FBS II 8x110 60/45 US TX	**536856**	●	8	120	10x110	50	60	-	-	65	45	13/40	50
FBS II 8x130 80/65 US TX	**536857**	●	8	140	10x130	50	80	-	-	65	65	13/40	50
FBS II 8X150 100/85 US TX	**558219**	●	8	160	10x150	50	100	-	-	65	85	13/40	50
FBS II 8x170 120/105 US TX	**558220**	●	8	180	10x170	50	120	-	-	65	105	13/40	50
FBS II 8x190 140/125 US TX	**558221**	●	8	200	10x190	50	140	-	-	65	125	13/40	20
FBS II 10x60 5/-/- US	**536858**	●	10	70	12x60	55	5	-	-	-	-	15	50
FBS II 10x70 15/5/- US	**536859**	●	10	80	12x70	55	15	65	5	-	-	15	50
FBS II 10x80 25/15/- US	**536860**	●	10	90	12x80	55	25	65	15	-	-	15	50
FBS II 10x90 35/25/5 US	**536861**	●	10	100	12x90	55	35	65	25	85	5	15	50
FBS II 10x100 45/35/15 US	**536862**	●	10	110	12x100	55	45	65	35	85	15	15	50
FBS II 10x120 65/55/35 US	**536863**	●	10	130	12x120	55	65	65	55	85	35	15	50
FBS II 10x140 85/75/55 US	**536864**	●	10	150	12x140	55	85	65	75	85	55	15	50
FBS II 10x160 105/95/75 US	**536865**	●	10	170	12x160	55	105	65	95	85	75	15	50
FBS II 10x200 145/135/115 US	**536866**	●	10	210	12x200	55	145	65	135	85	115	15	20
FBS II 10x230 175/165/145 US	**536867**	●	10	240	12x230	55	175	65	165	85	145	15	20
FBS II 10x260 205/195/175 US	**536868**	●	10	270	12x260	55	205	65	195	85	175	15	20
FBS II 10x280 225/215/195 US	**558222**	●	10	290	12x280	55	225	65	215	85	195	15	20
FBS II 12x70 10/-/- US	**536869**	●	12	80	14x70	60	10	-	-	-	-	17	20
FBS II 12x85 25/10/- US	**536870**	●	12	95	14x85	60	25	75	10	-	-	17	20
FBS II 12x110 50/35/10 US	**536871**	●	12	120	14x110	60	50	75	35	100	10	17	20
FBS II 12x130 70/55/30 US	**536872**	●	12	140	14x130	60	70	75	55	100	30	17	20
FBS II 12x150 90/75/50 US	**536873**	●	12	160	14x150	60	90	75	75	100	50	17	20
FBS II 12x170 110/95/70 US	**558223**	●	12	180	14x170	60	110	75	95	100	70	17	20
FBS II 12x190 130/115/90 US	**558224**	●	12	200	14x190	60	130	75	115	100	90	17	20
FBS II 12x210 150/135/110 US	**558225**	●	12	220	14x210	60	150	75	135	100	110	17	20
FBS II 14x75 10/-/- US	**536874**	●	14	90	16x75	65	10	-	-	-	-	21	20
FBS II 14x95 30/10/- US	**536875**	●	14	110	16x95	65	30	85	10	-	-	21	20





Concrete screw UltraCut FBS II galvanised steel

UltraCut FBS II US (TX) - hexagon head UltraCut FBS II SK - countersunk head

Item	Zinc-plated steel Item no.	Ap-proval ETA	Nominal drill-Ø d_0 [mm]	Minimum drill depth at push-through mode h_2 [mm]	Screws outer diameter x length [mm]	Screwing depth $h_{nom,1}$ [mm]	$t_{fix\,1}$ [mm]	$h_{nom,2}$ [mm]	$t_{fix\,2}$ [mm]	$h_{nom,3}$ [mm]	$t_{fix\,3}$ [mm]	Width across flat / internal torx drive [SW/TX]	Sales unit [pcs]
Item	**gvz**												
FBS II 14x100 35/15/- US	**536876**	●	14	115	16x100	65	35	85	15	-	-	21	20
FBS II 14x125 60/40/10 US	**536877**	●	14	140	16x125	65	60	85	40	115	10	21	10
FBS II 14x150 85/65/35 US	**536878**	●	14	165	16x150	65	85	85	65	115	35	21	10
FBS II 14x180 115/85/65 US	**558226**	●	14	195	16x180	65	115	85	95	115	65	21	10
FBS II 14x210 145/125/95 US	**558227**	●	14	225	16x210	65	145	85	125	115	95	21	10
FBS II 14x240 175/155/125 US	**558228**	●	14	255	16x240	65	175	85	155	115	125	21	10
FBS II 8x60 10/- SK	**536880**	●	8	70	10x60	50	10	-	-	-	-	40	50
FBS II 8x80 30/15 SK	**536881**	●	8	90	10x80	50	30	-	-	65	15	40	50
FBS II 8x90 40/25 SK	**536882**	●	8	100	10x90	50	40	-	-	65	25	40	50
FBS II 8x100 50/35 SK	**558229**	●	8	110	10x100	50	50	-	-	65	35	40	50
FBS II 8x110 60/45 SK	**558230**	●	8	120	10x110	50	60	-	-	65	45	40	50
FBS II 8x120 70/55 SK	**558231**	●	8	130	10x120	50	70	-	-	65	55	40	50
FBS II 8x140 90/75 SK	**558232**	●	8	150	10x140	50	90	-	-	65	75	40	50
FBS II 8x160 110/95 SK	**558233**	●	8	170	10x160	50	110	-	-	65	95	40	50
FBS II 8x180 130/115 SK	**558234**	●	8	190	10x180	50	130	-	-	65	115	40	20
FBS II 8x200 150/135 SK	**558235**	●	8	210	10x200	50	150	-	-	65	135	40	20
FBS II 10x65 10/-/- SK	**536884**	●	10	75	12x65	55	10	-	-	-	-	50	50
FBS II 10x80 25/15/- SK	**536885**	●	10	90	12x80	55	25	65	15	-	-	50	50
FBS II 10x95 40/30/10 SK	**536886**	●	10	105	12x95	55	40	65	30	85	10	50	50
FBS II 10x100 45/35/15 SK	**536887**	●	10	110	12x100	55	45	65	35	85	15	50	50
FBS II 10x120 65/55/35 SK	**536888**	●	10	130	12x120	55	65	65	55	85	35	50	50
FBS II 10x140 85/75/55 SK	**558236**	●	10	150	12x140	55	85	65	75	85	55	50	50
FBS II 10x160 105/95/75 SK	**558237**	●	10	170	12x160	55	105	65	95	85	75	50	50
FBS II 10x180 125/115/95 SK	**558238**	●	10	190	12x180	55	125	65	115	85	95	50	20

Assortment







Concrete screw UltraCut FBS II

UltraCut FBS II 6 P/LP
panhead

UltraCut FBS II 6 SK
countersunk head

UltraCut FBS II 6 US
hexagon head

	Zinc-plated steel	Ap-proval	Nominal drill-Ø	Minimum drill depth at push-through mode	Screws outer diameter x length	Screwing depth			Width across flat / internal torx drive	Sales unit
						screwing depth		usable length		
						Multiple fixing ETA-18/0242	Single fixing ETA-15/0352			
			d_0	h_2		$h_{nom,max}$ - $h_{nom,min}$	$h_{nom,min}$ - $h_{nom,max}$	$t_{fix,max}$ - $t_{fix,min}$		
	Item no.	ETA	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[SW/TX]	[pcs]
Item	gvz									
FBS II 6x30/5 P	546377	●	6	40	7,5 x 30	25	-	Screw length - h_{nom}	TX 30	100
FBS II 6x40/5 P	546378	●	6	50	7,5 x 40	25-35	-	Screw length - h_{nom}	TX 30	100
FBS II 6x40/5 LP	546379	●	6	50	7,5 x 40	25-35	-	Screw length - h_{nom}	TX 30	100
FBS II 6x60/5 P	546380	●	6	70	7,5 x 60	25-55	40-55	Screw length - h_{nom}	TX 30	100
FBS II 6x80/25 P	546381	●	6	90	7,5 x 80	25-55	40-55	Screw length - h_{nom}	TX 30	100
FBS II 6x30/5 SK	546382	●	6	40	7,5 x 30	25	-	Screw length - h_{nom}	TX 30	100
FBS II 6x40/5 SK	546383	●	6	50	7,5 x 40	25-35	-	Screw length - h_{nom}	TX 30	100
FBS II 6x60/5 SK	546384	●	6	70	7,5 x 60	25-55	40-55	Screw length - h_{nom}	TX 30	100
FBS II 6x80/25 SK	546385	●	6	90	7,5 x 80	25-55	40-55	Screw length - h_{nom}	TX 30	100
FBS II 6x100/45 SK	546386	●	6	110	7,5 x 100	25-55	40-55	Screw length - h_{nom}	TX 30	100
FBS II 6x120/65 SK	546387	●	6	130	7,5 x 120	25-55	40-55	Screw length - h_{nom}	TX 30	100
FBS II 6x140/85 SK	546388	●	6	150	7,5 x 140	25-55	40-55	Screw length - h_{nom}	TX 30	100
FBS II 6x160/105 SK	546389	●	6	170	7,5 x 160	25-55	40-55	Screw length - h_{nom}	TX 30	100
FBS II 6x40/5 US	546390	●	6	50	7,5 x 40	25-35	-	Screw length - h_{nom}	SW 10	100
FBS II 6x60/5 US	546391	●	6	70	7,5 x 60	25-55	40-55	Screw length - h_{nom}	SW 10	100
FBS II 6x80/25 US	546392	●	6	90	7,5 x 80	25-55	40-55	Screw length - h_{nom}	SW 10	100
FBS II 6x100/45 US	546393	●	6	110	7,5 x 100	25-55	40-55	Screw length - h_{nom}	SW 10	100
FBS II 6x120/65 US	546394	●	6	130	7,5 x 120	25-55	40-55	Screw length - h_{nom}	SW 10	100





Concrete screw UltraCut FBS II 6

UltraCut FBS II 6 M8/19
hanger bolt

UltraCut FBS II 6 M6 I; M8/M10 I
connection sleeve

	Zinc-plated steel	Ap-proval	Nominal drill-Ø	Minimum drill depth at pre-positioned mode	Screws outer diameter x length	Screwing depth		Width across flat	Sales unit
						Multiple fixing ETA-18/0242	Single fixing ETA-15/0352		
	Item no.	ETA	d_0 [mm]	h_2 [mm]	[mm]	h_{nom} [mm]	h_{nom} [mm]	[SW]	[pcs]
Item	gvz								
FBS II 6x25 M8/19	546395	●	6	30	7,5x25	25	–	SW 10	100
FBS II 6x35 M8/19	546396	●	6	40	7,5x35	35	–	SW 10	100
FBS II 6x55 M8/19	546397	●	6	60	7,5x55	55	55	SW 10	100
FBS II 6x35 M10/21	546398	●	6	40	7,5x35	35	–	SW 13	100
FBS II 6x55 M10/21	546399	●	6	60	7,5x55	55	55	SW 13	100
FBS II 6x35 M6 I	554065	●	6	40	7,5x35	35	–	SW 13	100
FBS II 6x55 M6 I	554066	●	6	60	7,5x55	55	55	SW 13	100
FBS II 6x35 M8/M10 I	546400	●	6	40	7,5x35	35	–	SW 13	100
FBS II 6x55 M8/M10 I	546401	●	6	60	7,5x55	55	55	SW 13	100

Optional installation of the fischer concrete screw with an cordless screwdriver.

Possible installation using a standard, high-performance cordless screwdriver if the ideal FSS 18V impact wrench ideal the application is not available.

▲ **ATTENTION** Hand twisting is possible or great strain on the wrist will occur!

Advantages:

- No need to purchase additional equipment for a few installations if a cordless screwdriver is already available.
- Lower noise level compared to the impact wrench.

Assembly with cordless screwdriver

Diameter x screw depth [h_{nom}]	Concrete Grade C 20/25 **Installation with new drill** centre square of drill bit (BEM: 6,25mm)	Concrete Grade C 20/25 **Installation with used drill** centre square of drill bit (BEM: 6,25mm)	Concrete Grade C 50/60 **Installation with new drill** centre square of drill bit (BEM: 6,25mm)	Concrete Grade C 50/60 **Installation with used drill** centre square of drill bit (BEM: 6,25mm)
FBS II 6x25	suitable	suitable	suitable	suitable
FBS II 6x30	suitable	suitable	suitable	suitable
FBS II 6x35	suitable	suitable	suitable	–
FBS II 6x40	suitable	suitable	suitable	–

Assortment





Concrete screw UltraCut FBS II R

UltraCut FBS II US R – hexagonal head

UltraCut FBS II SK R – countersunk head

	Stainless steel	Approval	Nominal drill-Ø	Minimum drill depth at push-through mode	Screws outer diameter x length	Screwing depth						Width across flat / internal torx drive	Sales unit
			d_0	h_2		$h_{nom,1}$	$t_{fix\,1}$	$h_{nom,2}$	$t_{fix\,2}$	$h_{nom,3}$	$t_{fix\,3}$		
	Item no.	ETA	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[SW/TX]	[pcs]
Item	R												
FBS II 8x60 10/– US R	543565	●	8	70	10x60	50	10	–	–	–	–	13	50
FBS II 8x70 20/5 US R	543566	●	8	80	10x70	50	20	–	–	65	5	13	50
FBS II 8x80 30/15 US R	543567	●	8	90	10x80	50	30	–	–	65	15	13	50
FBS II 8x90 40/25 US R	543568	●	8	100	10x90	50	40	–	–	65	25	13	50
FBS II 8x100 50/35 US R	558239	●	8	110	10x100	50	50	–	–	65	35	13	50
FBS II 8x120 70/55 US R	558240	●	8	130	10x120	50	70	–	–	65	55	13	50
FBS II 8x140 90/75 US R	558241	●	8	150	10x140	50	90	–	–	65	75	13	50
FBS II 8x160 110/95 US R	558242	●	8	170	10x160	50	110	–	–	65	95	13	50
FBS II 10x60 5/–/– US R	543569	●	10	70	12x60	55	5	–	–	–	–	15	50
FBS II 10x70 15/5/– US R	543570	●	10	80	12x70	55	15	65	5	–	–	15	50
FBS II 10x80 25/15/– US R	543571	●	10	90	12x80	55	25	65	15	–	–	15	50
FBS II 10x90 35/25/5 US R	543572	●	10	100	12x90	55	35	65	25	85	5	15	50
FBS II 10x100 45/35/15 US R	543573	●	10	110	12x100	55	45	65	35	85	15	15	50
FBS II 10x120 65/55/35 US R	543574	●	10	130	12x120	55	65	65	55	85	35	15	50
FBS II 10x140 85/75/55 US R	558243	●	10	150	12x140	55	85	65	75	85	55	15	50
FBS II 10x160 105/95/75 US R	558244	●	10	170	12x160	55	105	65	95	85	75	15	50
FBS II 12x70 10/–/– US R	543575	●	12	80	14x70	60	10	–	–	–	–	17	20
FBS II 12x85 25/10/– US R	543576	●	12	95	14x85	60	25	75	10	–	–	17	20
FBS II 12x110 50/35/10 US R	543577	●	12	120	14x110	60	50	75	35	100	10	17	20
FBS II 12x130 70/55/30 US R	543578	●	12	140	14x130	60	70	75	55	100	30	17	20
FBS II 12x160 100/85/60 US R	558245	●	12	170	14x160	60	100	75	85	100	60	17	20
FBS II 8x60 10/– SK R	543579	●	8	70	10x60	50	10	–	–	–	–	TX 40	50
FBS II 8x80 30/15 SK R	543580	●	8	90	10x80	50	30	–	–	65	15	TX 40	50
FBS II 8x90 40/25 SK R	543581	●	8	100	10x90	50	40	–	–	65	25	TX 40	50
FBS II 8x100 50/35 SK R	558246	●	8	110	10x100	50	50	–	–	65	35	TX 40	50
FBS II 8X120 70/55 SK R	558915	●	8	120	10x120	50	70	–	–	65	35	TX 40	50
FBS II 10x65 10/–/– SK R	543582	●	10	75	12x65	55	10	–	–	–	–	TX 50	50
FBS II 10x80 25/15/– SK R	543583	●	10	90	12x80	55	25	65	15	–	–	TX 50	50
FBS II 10x95 40/30/10 SK R	543584	●	10	105	12x95	55	40	65	30	85	10	TX 50	50
FBS II 10x100 45/35/15 SK R	543585	●	10	110	12x100	55	45	65	35	85	15	TX 50	50
FBS II 10x120 65/55/35 SK R	543586	●	10	130	12x120	55	65	65	55	85	35	TX 50	50



Concrete screw UltraCut FBS II 6 R

UltraCut FBS II 6 P R

UltraCut FBS II 6 SK R

UltraCut FBS II 6 US R

	Stainless steel	Ap-proval	Drill diameter	Screw length	Head-ø	Screw-in depth Multiple fixing ETA	Screw-in depth Single point fixing ETA	Usable length	Drive	Sales unit
			d_0	L	d_h	$h_{nom,min}$-$h_{nom,max}$	$h_{nom,min}$-$h_{nom,max}$	$t_{fix,min}$ - $t_{fix,max}$		
	Item no.	ETA	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		[pcs]
Item	R									
FBS II 6 x 50/5 P R	573429[1]	●	6	50	14	45	–	Screw length - h_{nom}	TX30	100
FBS II 6 x 65/5 P R	573430[2]	●	6	65	14	45 / 60	60	Screw length - h_{nom}	TX30	100
FBS II 6 x 85/25 P R	573431[2]	●	6	85	14	45 / 60	60	Screw length - h_{nom}	TX30	100
FBS II 6 x 105/45 P R	573432[2]	●	6	105	14	–	60	Screw length - h_{nom}	TX30	100
FBS II 6 x 50/5 SK R	573420[1]	●	6	50	13.25	45	–	Screw length - h_{nom}	TX30	100
FBS II 6 x 65/5 SK R	573421[2]	●	6	65	13.25	45 / 60	60	Screw length - h_{nom}	TX30	100
FBS II 6 x 85/25 SK R	573422[2]	●	6	85	13.25	45 / 60	60	Screw length - h_{nom}	TX30	100
FBS II 6 x 50/5 US R	573423[1]	●	6	50	15	45	–	Screw length - h_{nom}	SW 10	100
FBS II 6 x 50/5 US R	573426[1]	●	6	50	17	45	–	Screw length - h_{nom}	SW 13	100
FBS II 6 x 65/5 US R	573424[2]	●	6	65	15	45 / 60	60	Screw length - h_{nom}	SW 10	100
FBS II 6 x 65/5 US R	573427[2]	●	6	65	17	45 / 60	60	Screw length - h_{nom}	SW 13	100
FBS II 6 x 85/25 US R	573425[2]	●	6	85	15	45 / 60	60	Screw length - h_{nom}	SW 10	100
FBS II 6 x 85/25 US R	573428[2]	●	6	85	17	45 / 60	60	Screw length - h_{nom}	SW 13	100

[1] Values for screw-in depth in accordance with ETA-24/0973 for multiple fixings.
[2] Values for screw-in depth in accordance with ETA-17/0740 for single-point fixings and ETA-24/0973 for multiple fixings.

Assortment





Concrete screws UltraCut FBS II 8, 10, 12 and 14 CP

UltraCut FBS II US CP – hexagon head

UltraCut FBS II SK CP – countersunk head

	Corrosion protection	Approval	Nominal drill-Ø	Minimum drill depth at push-through mode	Screws outer diameter x length	Screwing depth						Width across flat / internal torx drive	Sales unit
			d_0	h_2		$h_{nom,1}$	$t_{fix\,1}$	$h_{nom,2}$	$t_{fix\,2}$	$h_{nom,3}$	$t_{fix\,3}$		
	Item no.	ETA	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[SW/TX]	[pcs]
Item	**CP**												
FBS II CP 8x55 5/- US TX	557781	●	8 mm	65	10x55	50	5	–	–	–	–	13/40	50
FBS II CP 8x70 20/5 US TX	557782	●	8 mm	80	10x70	50	20	–	–	65	5	13/40	50
FBS II CP 8x80 30/15 US TX	557783	●	8 mm	90	10x80	50	30	–	–	65	15	13/40	50
FBS II CP 8x90 40/25 US TX	557784	●	8 mm	100	10x90	50	40	–	–	65	25	13/40	50
FBS II CP 8x100 50/35 US TX	557785	●	8 mm	110	10x100	50	50	–	–	65	35	13/40	50
FBS II CP 10x60 5/-/- US	557786	●	10 mm	70	12x60	55	5	–	–	–	–	15	50
FBS II CP 10x70 15/5/- US	557787	●	10 mm	80	12x70	55	15	65	5	–	–	15	50
FBS II CP 10x80 25/15/- US	557788	●	10 mm	90	12x80	55	25	65	15	–	–	15	50
FBS II CP 10x90 35/25/5 US	557789	●	10 mm	100	12x90	55	35	65	25	85	5	15	50
FBS II CP 10x100 45/35/15 US	557790	●	10 mm	110	12x100	55	45	65	35	85	15	15	50
FBS II CP 10x120 65/55/35 US	557791	●	10 mm	130	12x120	55	65	65	55	85	35	15	50
FBS II CP 10x140 85/75/55 US	557792	●	10 mm	150	12x140	55	85	65	75	85	55	15	50
FBS II CP 10x160 105/95/75 US	557793	●	10 mm	170	12x160	55	105	65	95	85	75	15	50
FBS II CP 12x85 25/10/- US	557794	●	12 mm	95	14x85	60	25	75	10	–	–	17	20
FBS II CP 12x110 50/35/10 US	557795	●	12 mm	120	14x110	60	50	75	35	100	10	17	20
FBS II CP 14x75 10/-/- US	557796	●	14 mm	90	16x75	65	10	–	–	–	–	21	20
FBS II CP 14x95 30/10/- US	557797	●	14 mm	110	16x95	65	30	85	10	–	–	21	20
FBS II CP 14x100 35/15/- US	557798	●	14 mm	115	16x100	65	35	85	15	–	–	21	20
FBS II CP 14x125 60/40/10 US	557799	●	14 mm	140	16x125	65	60	85	40	115	10	21	10
FBS II CP 8x60 10/- SK	557800	●	8 mm	70	10x60	50	10	–	–	–	–	40	50
FBS II CP 8x80 30/15 SK	557801	●	8 mm	90	10x80	50	30	–	–	65	15	40	50
FBS II CP 8x90 40/25 SK	557802	●	8 mm	100	10x90	50	40	–	–	65	25	40	50
FBS II CP 10x65 10/-/- SK	557803	●	10 mm	75	12x65	55	10	–	–	–	–	50	50
FBS II CP 10x80 25/15/- SK	557804	●	10 mm	90	12x80	55	25	65	15	–	–	50	50
FBS II CP 10x100 45/35/15 SK	557805	●	10 mm	110	12x100	55	45	65	35	85	15	50	50









Technical data

Concrete screw FBS 4 and 5 zp

FBS 4/5 P

FBS 4 Cable Clamp

FBS 5 SK

FBS 5 US

FBS 5 M6/9

	Galvanised steel	Drill diameter	Min. drill hole depth	Screw outer diameter x length	Head-ø	Nominal embedment depth / thickness of fixture	Nominal embedment depth / thickness of fixture	Drive	Sales unit
		d_0	h_1	d_a x L	d_h	h_{nom1} / t_{fix}	h_{nom2} / t_{fix}		
	Item no.	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		[pcs]
Item	**gvz**								
FBS 4 x 30 /1 P	579370	4	40	5 x 30	9.3	30 / 1	–	TX25	200
FBS 4 x 50 20/15 P	579371	4	60	5 x 50	9.3	30 / 20	35 / 15	TX25	200
FBS 4 x 40 10/5 cable clamp screw	579372	4	50	5 x 40	7.6	30 / 10	35 / 5	TX20	200
FBS 5 x 40 /5 P	579367	5	50	6 x 40	11.8	35 / 5	–	TX30	100
FBS 5 x 50 15/5 P	579368	5	60	6 x 50	11.8	35 / 15	45 / 5	TX30	100
FBS 5 x 60 25/15 P	579369	5	70	6 x 60	11.8	35 / 25	45 / 15	TX30	100
FBS 5 x 40 /5 SK	579364	5	50	6 x 40	10.4	35 / 5	–	TX25	100
FBS 5 x 50 15/5 SK	579365	5	60	6 x 50	10.4	35 / 15	45 / 5	TX25	100
FBS 5 x 60 25/15 SK	579366	5	70	6 x 60	10.4	35 / 25	45 / 15	TX25	100
FBS 5 x 40 /5 US	579360	5	50	6 x 40	11.3	35 / 5	–	SW 8	100
FBS 5 x 50 15/5 US	579361	5	60	6 x 50	11.3	35 / 15	45 / 5	SW 8	100
FBS 5 x 60 25/15 US	579362	5	70	6 x 60	11.3	35 / 25	45 / 15	SW 8	100
FBS 5 x 70 35/25 US	579363	5	80	6 x 70	11.3	35 / 35	45 / 25	SW 8	100
FBS 5 x 45 M6/9	579373	5	55	6 x 45	10.8	–	45 / -	SW 10	100

Additional assortment

Complement for UltraCut FBS II

Checking gauge FUP | Nut SW | Nut TX | FMB TX 40 Maxx Bit | Profi-Bit FPB TX 50 5/16" | Filling washer FFD | Washer FSW 10 | Setting tool SC-ST | Washer U

Item	Item no.	Internal-Ø [mm]	External-Ø [mm]	Drive	Suitable for UltraCut FBS II [SW/TX]	Sales unit [Stück]
Checking gauge FUP 8	537200	9,9	–	–	FBS II 8	1
Checking gauge FUP 10	537201	12,0	–	–	FBS II 10	1
Checking gauge FUP 12	537202	13,9	–	–	FBS II 12	1
Checking gauge FUP 14	537203	15,6	–	–	FBS II 14	1
Nut SW 10	538577	–	–	1/2"/SW 10	FBS II 6	1
Nut SW 13	538578	–	–	1/2"/SW 13	FBS II 6/FBS II 8	1
Nut SW 15	538579	–	–	1/2"/SW 15	FBS II 10	1
Nut SW 17	538580	–	–	1/2"/SW 17	FBS II 12	1
Nut SW 21	538581	–	–	1/2"/SW 21	FBS II 14	1
Nut TX[1]	538575	–	–	1/2"–1/4"	FBS II 8/FBS II 8 SK + FBS II 6	1
Nut TX50[2]	553928	–	–	1/2"–5/16"	FBS II 10/FBS II 10 SK	1
FMB TX 30 Maxx Bit W5	533158	–	–	TX 30	FBS II 6	5
FMB TX 40 Maxx Bit W 5	533159	–	–	TX 40	FBS II 8/FBS II 8 SK	5
FPB Profi-Bit T 50 5/16"	538574	–	–	TX 50	FBS II 10 SK	1
FFD 22x9x6	547515	9	22	–	FBS II 6	4
FFD 26x12x6	538458	12	26	–	FBS II 8	4
FFD 26x12x6 R	541986	12	26	–	FBS II 8 R	4
FFD 30x14x6	538459	14	30	–	FBS II 10/FBS II 12	4
FFD 30x14x6 R	541987	14	30	–	FBS II 10 R/FBS II 12 R	4
FFD 38x19x7	538460	19	38	–	FBS II 14	4
Adjusting washer FSW 10[3]	557276	–	–	–	FBS II 10	40
Setting tool SC-ST 8	557872	–	–	–	FBS II 8 US	1
Setting tool SC-ST 10	557874	–	–	–	FBS II 10 US	1
Washer for FBS II 10	520471	13,5	44	–	FBS II 10	50

1) Suitable for FMB TX 40 Maxx Bit and FMB TX 30 Maxx Bit
2) Suitable for FPB Profi-Bit TX 50 5/16"
3) Mountable with Power-Fast FPF-PT 5x40 (652880)

Filling disc for UltraCut FBS II / FBS II CP / FBS II R

By using the backfilling disc, a backlash, e.g. in the case of shear forces, can be ruled out. For this purpose, the filling disc is placed on the concrete screw before installation (recess to the component).
In the next step, the FBS II is screwed in until the filling disc rests against the anchor plate. Now the filling with one of the injection mortars FIS HB, FIS V Plus, FIS SB or FIS EM Plus can be carried out through the lateral bore using the filling aid. The filling quantity depends on the thickness of the anchor plate and the size of the annular gap.
Typical fields of application are brackets, earthquake-approved anchorings

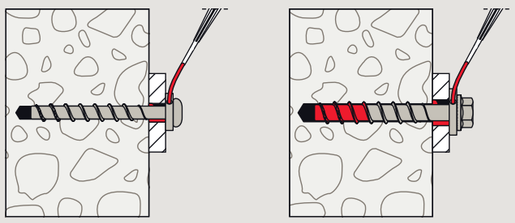



Installation Data

Installation data - Beton C20/25 - C50/60

Type US | Type I | Type P | Type M6

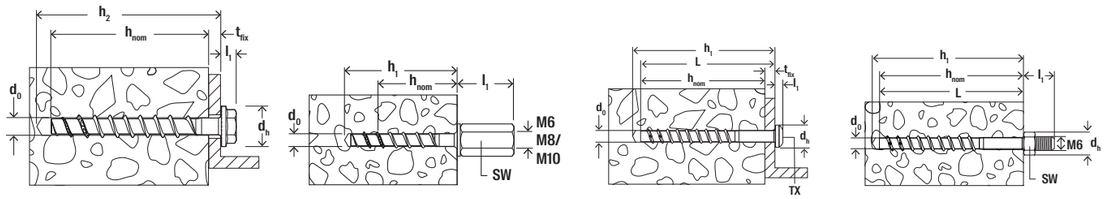

Type SK | Type M8/M10 | Type LP

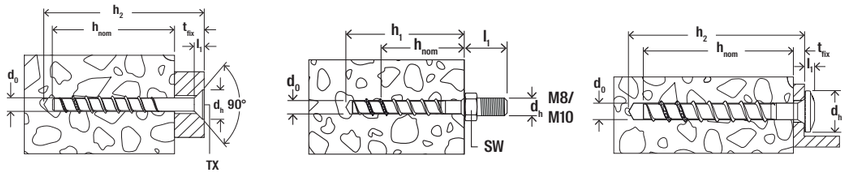

	l_1 [mm]	d_h [mm]
FBS 4 Cable Clamp Screw	2.7	7.6
FBS 4 P	3.1	9.3
FBS 5 SK	3.5	10.4
FBS 5 US	6.0	11.3
FBS 5 P	3.9	11.8
FBS 5 M6	9.0	10.8
UltraCut FBS II 6 SK	6.0	13.5
UltraCut FBS II 6 SK R	6.1	13.3
UltraCut FBS II 6 P	3.9	14.4
UltraCut FBS II 6 P R	3.7	14.4
UltraCut FBS II 6 LP	3.6	17.5
UltraCut FBS II 6 US (SW10)	6.4	17.0

	l_1 [mm]	d_h [mm]
UltraCut FBS II 6 US (SW13)	6.1	17.0
UltraCut FBS II 6 US R (SW10)	6.5	15.0
UltraCut FBS II 6 US R (SW13)	6.2	17.0
UltraCut FBS II M8/M10	3.6/5	13.9
UltraCut FBS II 6 I M8/M10; M6	37/32	-
UltraCut FBS II 8 US gvz/CP/R	8.4	18.0
UltraCut FBS II 10 US gvz/CP/R	9.9	20.5
UltraCut FBS II 8 SK gvz/CP/R	6.3	18.0
UltraCut FBS II 10 SK gvz/CP/R	6.9	21.0
UltraCut FBS II 12 US gvz/CP/R	10.3	23.0
UltraCut FBS II 14 US gvz/CP	11.5	28.0

Concrete screw FBS 4/5 gvz and UltraCut FBS II 6-14 gvz/CP/R

Installation parameters

Concrete screw FBS 4/5 gvz UltraCut FBS II 6-14 gvz/CP/R	Drill hole diameter d_0 [mm]	Nominal screw-in depth h_{nom1} [mm]	h_{nom2} [mm]	h_{nom3} [mm]	Drill hole depth h_1 / h_2 ≥ [mm]	Clearance hole diameter d_f [mm]	Maximum torque for installation with impact screw driver in concrete[1] $T_{imp, max\ gvz}$ [Nm]	$T_{imp, max\ R}$ [Nm]	Width across flat SW	Drive TX
FBS 4	4	30	35	–	l + 10	5,5	65	–	–	TX 25 (P), TX 20 (SK)
FBS 5	5	35	45	–	l + 10	6,5	65	–	8[3]	TX 30 (P), TX25 (SK)
FBS II 6	6	25–55	25–55	25–55	l + 10	≥ 8	450[2]	–	10[4]	TX 30
FBS II 8	8	50	–	65	l + 10	10.6–12	600	450	13	TX 40 (SK und US)
FBS II 10	10	55	65	85	l + 10	12.8–14	650	450	15	TX 50 (SK)
FBS II 12	12	60	75	100	l + 10	14.8–16	650	650	17	–
FBS II 14	14	65	85	115	l + 15	16.9–18	650	–	21	–

1) The values refer to a concrete strength of 40 N/mm², the values may vary for other concrete strength classes. The conversion from nominal output to effective torque varies depending on the machine used. Therefore, always use torque control.
2) For screw-in depths <35mm 80Nm
3) SW 10 with FBS and M6 thread on the head
4) SW 13 for FBS II with thread on the head and FBS II with M8/M19 I

Loads

Concrete screw UltraCut FBS II 6 – 14 gvz and CP in concrete

Permissible loads of a single anchor[1] in normal concrete of strength class C20/25.

For the design the complete current assessment ETA-15/0352 has to be considered.

					Cracked concrete				Non-cracked concrete			
	Material/ surface	Screw-in depth	Minimum member thickness	Instal-lation torque	Permissible tension (N_{perm}) and shear loads (V_{perm}); minimum spacing (s_{min}) and edge distances (c_{min}) with reduced loads				Permissible tension (N_{perm}) and shear loads (V_{perm}); minimum spacing (s_{min}) and edge distances (c_{min}) with reduced loads			
Type		h_{nom} [mm]	h_{min} [mm]	$T_{imp,max}$ [2] [Nm]	N_{perm} [3] [kN]	V_{perm} [3] [kN]	s_{min} [3] [mm]	c_{min} [3] [mm]	N_{perm} [3] [kN]	V_{perm} [3] [kN]	s_{min} [3] [mm]	c_{min} [3] [mm]
FBS II 6	gvz	40	80	450	1.2	4.3	35	35	3.8	4.3	35	35
	gvz	45	90	450	1.7	4.3	35	35	4.8	4.3	35	35
	gvz	50	90	450	1.9	4.3	35	35	5.7	4.3	35	35
	gvz	55	100	450	2.4	6.3	35	35	6.4	6.3	35	35
FBS II 8	gvz / CP	50	100	600	2.9	4.1	35	35	5.9	5.9	35	35
	gvz / CP	65	120	600	5.7	9.0	35	35	8.8	9.0	35	35
FBS II 10	gvz / CP	55	100	650	4.3	4.6	40	40	6.6	6.6	40	40
	gvz / CP	65	120	650	5.7	11.9	40	40	8.5	14.0	40	40
	gvz / CP	85	140	650	9.2	16.6	40	40	13.1	16.6	40	40
FBS II 12	gvz / CP	60	110	650	5.3	10.6	50	50	7.5	15.1	50	50
	gvz / CP	75	130	650	7.6	15.2	50	50	10.9	15.2	50	50
	gvz / CP	100	150	650	12.0	20.3	50	50	17.1	20.3	50	50
FBS II 14	gvz / CP	65	120	650	5.8	11.6	60	60	8.3	16.6	60	60
	gvz / CP	85	140	650	9.0	18.0	60	60	12.8	22.1	60	60
	gvz / CP	115	180	650	14.7	29.4	60	60	21.0	29.4	60	60

1) Design according to EN 1992-4:2018 (for static resp. quasi-static loads). The partial safety factors for material resistance as regulated in the ETA as well as a partial safety factor for load actions of γ_L = 1.4 are considered. As a single anchor counts e.g. an anchor with a spacing s ≥ 3 x h_{ef} and an edge distance c ≥ 1.5 x h_{ef}. Accurate data see ETA.
2) Maximum allowable torque for installation with any tangential impact screw driver. Further technical data see ETA.
3) In the case of combinations of tensile and shear loads, bending moments with reduced or minimum spacing and edge distances (anchor groups), the design must be carried out in accordance with the provisions of the complete ETA and the provisions of the EN 1992-4:2018. We recommend using our anchor design software C-FIX.

Concrete screw UltraCut FBS II 6 – 12 R in concrete

Permissible loads of a single anchor[1] in normal concrete of strength class C20/25.

For the design the complete current assessment ETA-17/0740 of 2025.01.08 has to be considered.

					Cracked concrete				Non-cracked concrete			
	Material/ surface	Screw-in depth	Minimum member thickness	Maximum Instal-lation torque	Permissible tension (N_{perm}) and shear loads (V_{perm}); minimum spacing (s_{min}) and edge distances (c_{min}) with reduced loads				Permissible tension (N_{perm}) and shear loads (V_{perm}); minimum spacing (s_{min}) and edge distances (c_{min}) with reduced loads			
Type		h_{nom} [mm]	h_{min} [mm]	$T_{imp.max}$ [2] [Nm]	N_{perm} [3] [kN]	V_{perm} [3] [kN]	s_{min} [3] [mm]	c_{min} [3] [mm]	N_{perm} [3] [kN]	V_{perm} [3] [kN]	s_{min} [3] [mm]	c_{min} [3] [mm]
FBS II 6 R	R	60	100	240	1.4	7.2	35	35	3.4	7.2	35	35
FBS II 8 R	R	50	100	450	1.9	4.1	35	35	3.3	5.9	35	35
	R	65	120	450	4.3	6.1	35	35	6.7	8.8	35	35
FBS II 10 R	R	55	100	450	2.1	4.6	40	40	4.0	6.6	40	40
	R	65	120	450	2.9	6.0	40	40	6.7	8.5	40	40
	R	85	140	450	7.6	18.4	40	40	13.1	20.9	40	40
FBS II 12 R	R	60	110	650	2.1	5.3	50	50	4.8	7.5	50	50
	R	75	130	650	5.2	15.2	50	50	5.7	21.8	50	50
	R	100	150	650	12.0	23.9	50	50	17.1	26.2	50	50

1) Design according to EN 1992-4:2018 (for static resp. quasi-static loads). The partial safety factors for material resistance as regulated in the ETA as well as a partial safety factor for load actions of γ_L = 1.4 are considered. As a single anchor counts e.g. an anchor with a spacing s ≥ 3 x h_{ef} and an edge distance c ≥ 1.5 x h_{ef}. Accurate data see ETA.
2) Maximum allowable torque for installation using any tangential impact screwdriver. For further technical information, see the ETA.
3) In the case of combinations of tensile and shear loads, bending moments with reduced or minimal edge and axial spacings (anchor groups), the design must comply with the provisions of the complete ETA and EN 1992-4:2018. We recommend using our anchor design software C-FIX.

Concrete screw UltraCut FBS II 6 gvz and 8 – 10 gvz, CP, R in solid and perforated masonry

Permissible loads1[2] for a single anchor in masonry for Push-through installation.

For the design the complete current assessment ETA-20/0134 of 14.07.2022 has to be considered.

Type	Min. compres-sive brick strength f_b [N/mm²]	Brick raw density ρ [kg/dm³]	Minimum brick dimensions (L x W x H) [mm]	Nominal ancho-rage depth h_{nom} [mm]	Mini-mum member thick-ness h_{min} [mm]	Maximum Installa-tion torque $T_{imp.max}$ [3] [Nm]	Permis-sible tensile load[4] N_{perm} [kN]	Permissi-ble shear load[4] parallel[6] $V_{perm\parallel}$ [kN]	Minimum spacing[5] $s_{min\parallel}$ / $s_{min\parallel}$ [mm]	Minimum edge dis-tance[5] c_{min} [mm]
Solid brick Mz, acc. to EN 771-1										
FBS II 6	≥ 12.0	≥ 1.8	240 x 115 x 71	≥ 40	≥ 115	80	0.54	0.34	80	50
FBS II 6	≥ 16.0	≥ 1.8	240 x 115 x 71	≥ 40	≥ 115	80	0.60	0.40	80	50
FBS II 6	≥ 17.5	≥ 1.8	240 x 115 x 71	≥ 40	≥ 115	80	0.66	0.40	80	50
FBS II 8	≥ 12.0	≥ 1.8	240 x 115 x 71	≥ 50	≥ 115	80	0.46	1.37	80	60
FBS II 8	≥ 16.0	≥ 1.8	240 x 115 x 71	≥ 50	≥ 115	80	0.54	1.60	80	60
FBS II 8	≥ 17.5	≥ 1.8	240 x 115 x 71	≥ 50	≥ 115	80	0.57	1.66	80	60
FBS II 10	≥ 12.0	≥ 1.8	240 x 115 x 71	≥ 55	≥ 115	80	0.40	1.26	80	70
FBS II 10	≥ 16.0	≥ 1.8	240 x 115 x 71	≥ 55	≥ 115	80	0.46	1.46	80	70
FBS II 10	≥ 17.5	≥ 1.8	240 x 115 x 71	≥ 55	≥ 115	80	0.49	1.51	80	70
Solid brick Mz, nordic, acc. to EN 771-1										
FBS II 6	≥ 16.0	≥ 1.8	228 x 108 x 54	≥ 40	≥ 108	80	0.34	0.31	80	50
FBS II 6	≥ 20.0	≥ 1.8	228 x 108 x 54	≥ 40	≥ 108	80	0.40	0.37	80	50
FBS II 8	≥ 16.0	≥ 1.8	228 x 108 x 54	≥ 50	≥ 108	80	0.46	1.34	80	60
FBS II 8	≥ 20.0	≥ 1.8	228 x 108 x 54	≥ 50	≥ 108	80	0.51	1.49	80	60
FBS II 10	≥ 16.0	≥ 1.8	228 x 108 x 54	≥ 55	≥ 108	80	0.37	1.23	80	70
FBS II 10	≥ 20.0	≥ 1.8	228 x 108 x 54	≥ 55	≥ 108	80	0.43	1.37	80	70
Solid sand-lime brick KS, acc. to EN 771-2										
FBS II 6	≥ 12.0	≥ 1.8	240 x 115 x 71	≥ 40	≥ 115	80	0.43	0.51	80	50
FBS II 6	≥ 16.0	≥ 1.8	240 x 115 x 71	≥ 40	≥ 115	80	0.49	0.60	80	50
FBS II 6	≥ 20.0	≥ 1.8	240 x 115 x 71	≥ 40	≥ 115	80	0.54	0.66	80	50
FBS II 8	≥ 12.0	≥ 1.8	240 x 115 x 71	≥ 50	≥ 115	80	0.54	0.66	80	60
FBS II 8	≥ 16.0	≥ 1.8	240 x 115 x 71	≥ 50	≥ 115	80	0.60	0.74	80	60
FBS II 8	≥ 20.0	≥ 1.8	240 x 115 x 71	≥ 50	≥ 115	80	0.69	0.83	80	60
FBS II 10	≥ 12.0	≥ 1.8	240 x 115 x 71	≥ 55	≥ 115	80	0.54	0.89	80	70
FBS II 10	≥ 16.0	≥ 1.8	240 x 115 x 71	≥ 55	≥ 115	80	0.63	1.00	80	70
FBS II 10	≥ 20.0	≥ 1.8	240 x 115 x 71	≥ 55	≥ 115	80	0.69	1.11	80	70
Perforated sand-lime brick KSL, acc. to EN 771-2										
FBS II 6	≥ 10.0	≥ 1.4	240 x 175 x 113	≥ 40	≥ 175	65	0.09	0.80	80	50
FBS II 6	≥ 12.0	≥ 1.4	240 x 175 x 113	≥ 40	≥ 175	65	0.11	0.94	80	50
FBS II 6	≥ 16.0	≥ 1.4	240 x 175 x 113	≥ 40	≥ 175	65	0.14	1.17	80	50
FBS II 6	≥ 17.5	≥ 1.4	240 x 175 x 113	≥ 40	≥ 175	65	0.17	1.26	80	50
FBS II 8	≥ 10.0	≥ 1.4	240 x 175 x 113	≥ 50	≥ 175	65	0.26	0.66	80	60
FBS II 8	≥ 12.0	≥ 1.4	240 x 175 x 113	≥ 50	≥ 175	65	0.29	1.03	80	60
FBS II 8	≥ 16.0	≥ 1.4	240 x 175 x 113	≥ 50	≥ 175	65	0.37	1.40	80	60
FBS II 8	≥ 17.5	≥ 1.4	240 x 175 x 113	≥ 50	≥ 175	65	0.40	1.49	80	60
FBS II 10	≥ 10.0	≥ 1.4	240 x 175 x 113	≥ 55	≥ 175	65	0.23	0.77	80	70
FBS II 10	≥ 12.0	≥ 1.4	240 x 175 x 113	≥ 55	≥ 175	65	0.26	1.23	80	70
FBS II 10	≥ 16.0	≥ 1.4	240 x 175 x 113	≥ 55	≥ 175	65	0.34	1.66	80	70
FBS II 10	≥ 17.5	≥ 1.4	240 x 175 x 113	≥ 55	≥ 175	65	0.37	1.77	80	70

1) The partial safety factors for material resistance as regulated in assessment as well as a partial safety factor for load actions of γ_L = 1.4 are considered. Load values are valid for zinc-plated steel all sizes and head shapes, for stainless steel R for the sizes 8 and 10. Exakt values see ETA.
2) The given loads are valid for installation and use of fixations in dry masonry, use category d/d, width of the joints w_j ≤ 3 mm and general purpose mortar with strength class M2.5 -M9. Further information and details on drill hole preparation, etc., see ETA.
3) Maximum allowable device torque for installation with any tangential impact screw driver. Further technical data see ETA.
4) In the case of combinations of tensile and shear loads, bending moments and reduced edge and axial spacings (anchor groups), the design must be carried out in accordance with the provisions of the complete assessment.
5) Minimum feasible spacing resp. edge distance. Details as well as to the distances to joints see assessment.
6) Shear load parallel to the vertical joint. Load reduction for shear load perpendicular to the vertical joint see ETA.

Loads

Concrete screw UltraCut FBS II for temporary fastening in concrete

Permissible loads of a single anchor[1] in normal concrete of strength class C20/25 to C50/60.

For the design the complete current assessment Z-21.8-2049 has to be considered.

Type	Material/ surface	Screw-in depth h_{nom} [mm]	Minimum member thickness h_{min} [mm]	Maximum installation torque $T_{imp,max}$ [2] [Nm]	Minimum spacing (s_{min}) and edge distances (c_{min}) s_{min} [mm]	c_{min} [3] [mm]	Cracked and non-cracked concrete Permissible load F_{perm} [4] $f_{c,cube} \geq 10$ N/mm² [kN]	$f_{c,cube} \geq 15$ N/mm² [kN]	$f_{c,cube} \geq 20$ N/mm² [kN]	$f_{c,cube} \geq 25$ N/mm² [kN]
FBS II 8	gvz	50	100	400	200	65	1.9	2.3	2.6	2.9
	gvz	65	150	400	300	100	3.6	4.4	5.1	5.6
FBS II 10	gvz	55	105	400	210	70	2.2	2.7	3.1	3.5
	gvz	65	130	400	260	85	2.9	3.5	4.1	4.5
	gvz	85	205	650	410	135	5.8	7.1	8.1	9.1
FBS II 12	gvz	60	120	400	240	80	2.8	3.4	3.9	4.4
	gvz	75	150	400	300	100	4.0	4.9	5.6	6.1
	gvz	100	240	650	480	160	7.6	9.3	10.8	12.0
FBS II 14	gvz	65	115	400	230	75	2.3	2.8	3.2	3.6
	gvz	85	150	400	300	100	3.6	4.4	5.0	5.6
	gvz	115	255	650	510	170	8.9	10.9	12.6	14.0

[1] Material safety factor as well as a partial safety factor for load actions of $\gamma_L = 1.4$ is considered. The screw may be used in the concrete member before the characteristic compressive strength $f_{ck,cube}$ is reached. In this case, the concrete compressive strength $f_{c,cube}$ must have reached a value of at least 10 N/mm². Only intended for temporary use and one-time screwing into the same drill hole. Conditions for reuse of the screw see, approval.
[2] Values for impulse wrenches with tangential impact and automatic stop device.
[3] In case of combined action of shear load and installation close to the edge, the edge distance must be $\geq c_{min}$ x 1.5. Detail see approval.
[4] Values valid for all load directions.

Concrete screw UltraCut FBS II 6 gvz in concrete

Permissible loads for a single anchor[1] for multiple use of redundant non-structural applications* in normal concrete C20/25.

For the design the complete current assessment ETA - 18/0242 has to be considered.

Type	Material/ surface	Screw-in depth h_{nom} [mm]	Minimum member thickness h_{min} [mm]	Maximum installation torque $T_{inst,max}$ [2] [Nm]	Cracked concrete: Permissible tension (N_{perm}) and shear loads (V_{perm}); minimum spacing (s_{min}) and edge distances (c_{min}) with reduced loads N_{perm} [3] [kN]	V_{perm} [3] [kN]	s_{min} [3] [mm]	c_{min} [3] [mm]	Non-cracked concrete: Permissible tension (N_{perm}) and shear loads (V_{perm}); minimum spacing (s_{min}) and edge distances (c_{min}) with reduced loads N_{perm} [3] [kN]	V_{perm} [3] [kN]	s_{min} [3] [mm]	c_{min} [3] [mm]
FBS II 6	gvz	25	80	≤ 5	0.7	1.8	35	35	1.4	2.3	35	35
	gvz	30	80	≤ 5	1.2	2.3	35	35	2.4	2.3	35	35
	gvz	35	80	≤ 5	1.7	4.3	35	35	3.1	4.3	35	35
	gvz	40	80	≤ 10	2.4	4.3	35	35	3.8	4.3	35	35
	gvz	45	90	≤ 10	2.9	4.3	35	35	4.8	4.3	35	35
	gvz	50	90	≤ 10	3.6	4.3	35	35	5.7	4.3	35	35
	gvz	55	100	≤ 10	4.0	6.3	35	35	6.4	6.3	35	35

* In addition to the load table above, the following must be considered for multiple fastening of non-structural redundant systems:
A multiple fixing (redundant system) according to EN 1992-4 and CEN/TR 17079 is defined by
- at least 3 fixing points (per attached element) with at least one anchor at each fixing point and a permissible load per fixing point of 1.4 kN
- or by at least 4 fixing points with at least one anchor each fixing point and a permissible load per fixing point of 2.1 kN
- Additionally, it has to be proven that the stiffness of the attached element shall be large enough to ensure that in case of excessive slip or failure of a fastener the load on this fastener or fixing point can be transferred to neighbouring fixing points without significantly violating the requirements on the attached element in the serviceability and ultimate limit state.

For further details see EN 1992-4 section 7.3 and CEN/TR 17079.

[1] Design according to EN 1992-4:2018 (for static resp. quasi-static loads). The partial safety factors for material resistance as regulated in the ETA as well as a partial safety factor for load actions of $\gamma_L = 1.4$ are considered.
[2] Further technical information for installation see ETA.
[3] In the case of combinations of tensile and shear loads, bending moments with reduced or minimal edge and axial spacings (anchor groups), the design must be carried out in accordance with the provisions of the complete ETA and the provisions of the EN 1992-4:2018.

Concrete screw UltraCut FBS II 6 gvz in pre-stressed hollow-core slabs

Permissible loads for a single anchor[1] for multiple use of redundant non-structural applications* in pre-stressed hollow-core concrete slabs of concrete strength C30/37.

For the design the complete current assessment ETA - 18/0242 has to be considered.

Type			FBS II 6 gvz						
Screw-in depth		h_{nom}	**25**	**30**	**35**	**40**	**45**	**50**	**55**
Permissible load F_{perm} [3] in the respective bottom flange thickness									
$d_b \geq 25$ mm		[kN]	0.2	0.5	0.5	0.5	0.5	0.5	0.5
$d_b \geq 30$ mm		[kN]	1.7	1.7	1.7	1.7	1.7	1.7	1.7
$d_b \geq 35$ mm		[kN]	1.7	1.9	2.1	2.4	2.6	2.9	3.1
$d_b \geq 40$ mm		[kN]	1.7	2.3	2.6	2.9	3.3	3.6	3.8
$d_b \geq 50$ mm		[kN]	1.7	2.3	3.3	3.8	4.3	4.3	5.7
Installation torque	$T_{inst,max}$	[Nm]	5.0	5.0	10	10	10	10	10
Minimum spacing	$s_{t,s2}$ [2]	[mm]	100	100	100	100	100	100	100
Minimum edge distance	$c_{t,c2}$ [2]	[mm]	100	100	100	100	100	100	100

* In addition to the load table above, the following must be considered for multiple fastening of non-structural redundant systems:
A multiple fixing (redundant system) according to EN 1992-4 and CEN/TR 17079 is defined by
- at least 3 fixing points (per attached element) with at least one anchor at each fixing point and a permissible load per fixing point of 1.4 kN
- or by at least 4 fixing points with at least one anchor each fixing point and a permissible load per fixing point of 2.1 kN
- Additionally, it has to be proven that the stiffness of the attached element shall be large enough to ensure that in case of excessive slip or failure of a fastener the load on this fastener or fixing point can be transferred to neighbouring fixing points without significantly violating the requirements on the attached element in the serviceability and ultimate limit state.

For further details see EN 1992-4 section 7.3 and CEN/TR 17079.

[1] Design according to EN 1992-4:2018 (for static resp. quasi-static loads). The partial safety factors for material resistance as regulated in the ETA as well as a partial safety factor for load actions of $\gamma_L = 1.4$ are considered.
[2] Further technical information for installation see ETA.
[3] Valid for tensile load, shear load and oblique load under any angle. In the case of combinations of tensile, shear loads and bending moments, the design must be carried out in accordance with the provisions of the complete ETA and the provisions of the EN 1992-4:2018.

Concrete screw UltraCut FBS II 6 R in concrete

Permissible loads for a single anchor[1] for multiple use of redundant non-structural applications* in normal concrete C20/25.

For the design the complete current assessment ETA-24/0973 of 2025.01.08 has to be considered.

Type	Material/ surface	Screw-in depth h_{nom} [mm]	Minimum member thickness h_{min} [mm]	Maximum installation torque $T_{inst.max}$ [2] [Nm]	Cracked concrete: Permissible tension (N_{perm}) and shear loads (V_{perm}); minimum spacing (s_{min}) and edge distances (c_{min}) with reduced loads N_{perm} [3] [kN]	V_{perm} [3] [kN]	s_{min} [3] [mm]	c_{min} [3] [mm]	Non-cracked concrete: Permissible tension (N_{perm}) and shear loads (V_{perm}); minimum spacing (s_{min}) and edge distances (c_{min}) with reduced loads N_{perm} [3] [kN]	V_{perm} [3] [kN]	s_{min} [3] [mm]	c_{min} [3] [mm]
FBS II 6 R	R	45	100	240	0.9	2.5	35	35	1.7	2.5	35	35
	R	60	100	240	2.0	6.0	35	35	3.4	6.0	35	35

* In addition to the load table above, the following must be considered for multiple fastening of non-structural redundant systems:
A multiple fixing (redundant system) according to EN 1992-4 and CEN/TR 17079 is defined by
- at least 3 fixing points (per attached element) with at least one anchor at each fixing point and a permissible load per fixing point of 1.4 kN
- or by at least 4 fixing points with at least one anchor each fixing point and a permissible load per fixing point of 2.1 kN
- Additionally, it has to be proven that the stiffness of the attached element shall be large enough to ensure that in case of excessive slip or failure of a fastener the load on this fastener or fixing point can be transferred to neighbouring fixing points without significantly violating the requirements on the attached element in the serviceability and ultimate limit state.

For further details see EN 1992-4 section 7.3 and CEN/TR 17079.

[1] Design according to EN 1992-4:2018 (for static resp. quasi-static loads). The partial factors for material resistance as regulated in the ETA as well as a partial safety factor for load actions of $\gamma_L = 1.4$ are considered.
[2] Maximum allowable torque for installation using any tangential impact screwdriver. For further technical information, see the ETA.
[3] In the case of combinations of tensile and shear loads, bending moments as well as reduced or minimal edge and axial spacings (anchor groups), the design must comply with the provisions of the complete ETA and EN 1992-4:2018.

Loads

Concrete screw FBS 4 and 5 zp						
Recommended loads of a single anchor in normal concrete of strength class C20/25 until C50/60[1].						
Type			**FBS 4**		**FBS 5**	
Borehole diameter	d_0	**[mm]**	4	4	5	5
Screw-in depth	h_{nom}	**[mm]**	30	35	35	45
Non-cracked concrete≥ C20/25						
Recommended tension loads	N_{rec}	**[kN]**	0.9	1.0	1.3	2.2
Recommended shear loads	V_{rec}	**[kN]**	1.9	1.9	2.4	2.8
Cracked concrete ≥ C20/25[2]						
Recommended tension loads	N_{rec}	**[kN]**	0.2	0.2	1.0	1.5
Recommended shear loads	V_{rec}	**[kN]**	1.9	1.9	2.4	2.8
Installation Parameters						
Minimum concrete member thickness	h_{min}	**[mm]**	80	80	80	80
Minimum spacing / for an edge distance of	s_{min} / c	**[mm]**	25 / 25	35 / 55	35 / 55	35 / 65
Minimum edge distance / for a spacing of	c_{min} / s	**[mm]**	25 / 25	35 / 55	35 / 55	35 / 65
Maximum installation torque	$T_{inst,max}$	**[Nm]**	4	4	15	15
Maximum torque for impact screwdriver	$T_{imp,max}$	**[Nm]**	65	65	65	65

[1] Valid for zinc-plated concre screws (zp) in uncracked or cracked concrete of classes C20/25 to C50/60. Avoid hitting reinforcements when drilling.
[2] Valid for multiple fixings of non-load-bearing redundant systems in concrete. The partial safety factors for resistances and a partial safety factor for action of γ_F = 1.4, as specified in the values, are taken into account.

FiXperience

FiXperience.
Safe and reliable.

The fischer design Software FiXperience gives you safe and reliable support in dimensioning your projects whether you are a planer, structural engineer or craftsman. FiXperience is set up modularly and useable for a variety of applications. The program includes an engineering software with special application modules:

C-FIX

C-FIX
The anchor design program for steel and bonded anchor in concrete, as well as injection systems for masonry. Now with the new FEM design tool for the realistic design of anchorages.

WOOD-FIX

WOOD-FIX
For the calculation of on-rafter insulation systems and joints in structural timber engineering.

INSTALL-FIX

INSTALL-FIX
For the design and dimensioning of MEP installation systems.

REBAR-FIX

REBAR-FIX
For the design of post-installed rebars in reinforced concrete.

SOLARPANEL-FIX

SOLARPANEL-FIX
For the design and dimensioning of mounting systems for photovoltaic panels.

REINFORCE-FIX

REINFORCE-FIX
Design program for flexular and shear strengthening of reinforced concrete structures with CFRP Laminates and CF Fabrics.

RAIL-FIX

RAIL-FIX
For the design of fixings for railings on reinforced concrete slabs and staircases.

FACADE-FIX

FACADE-FIX
For the design of façade fixings with timber sub-structure.

CHANNEL-FIX

CHANNEL-FIX
For the design of cast-in channels and inserts.

Register on the **myfischer portal** to use **FiXperience online** or **download FiXperience** for free.

Dealer:

www.fischer-international.com

fischer stands for

Fixing Systems
fischertechnik
Consulting
Electronic Solutions

fischerwerke GmbH & Co. KG
Klaus-Fischer-Straße 1 · 72178 Waldachtal
Germany
P +49 7443 12 - 0
www.fischer-international.com · info@fischer.de

538782 (7) · 12/2025 · V-MB · Printed in Germany · Subject to technical modifications.